SDD-08-❑-❑

Double Acting

Mount: Stud **Standard Stroke Lengths:** 1/2″, 1″, 1-1/2″, 2″, 3″, 4″
Type: Double Rod **Maximum Stroke:** 20″ For B option add 0.500
Options: M, B, W, V, N, P6, P7, P8 For M option add 0.312

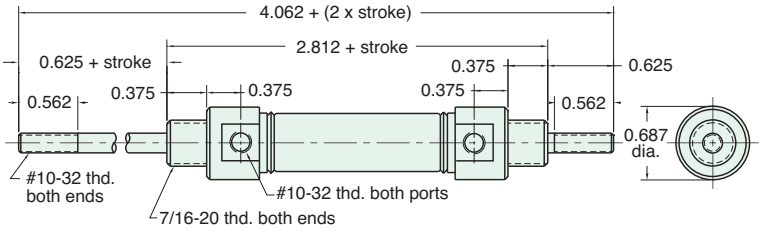

Nuts included, but not shown on drawing

SRR-08-❑-❑

Reverse Acting

Mount: Stud **Standard Stroke Lengths:** 1/2″, 1″, 1-1/2″, 2″, 3″, 4″
Type: Rotating Rod **Spring Compressed:** 2 lbs. **Spring At Rest:** 0.9 lbs.
Options: M, B, W, V, N, H **Maximum Stroke:** 15″ For B option add 0.500
For M option add 0.312

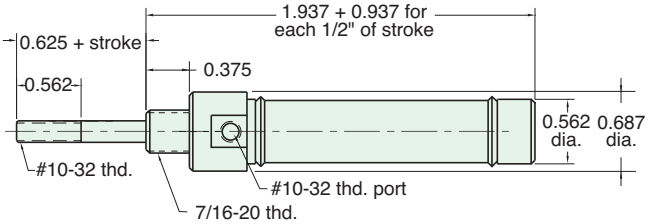

Nut included, but not shown on drawing

URR-08-❑-❑

Reverse Acting

Mount: Universal **Standard Stroke Lengths:** 1/2″, 1″, 1-1/2″, 2″, 3″, 4″
Type: Rotating Rod **Spring Compressed:** 2 lbs. **Spring At Rest:** 0.9 lbs.
Options: M, B, W, V, N, H, P2, P3, P4, P5, P6, P7, P8 **Maximum Stroke:** 15″ For B option add 0.500
For M option add 0.312

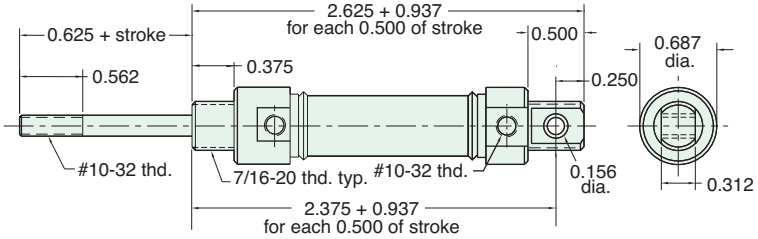

Furnished without nut(s). See Chart on Page 16.

Did you know that all Clippard Cylinders are 100% tested.