




9/16" BORE STAINLESS STEEL CYLINDER

USN-09-□-□

Single Acting



Mount: Universal **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Non-Rotating Rod **Spring Compressed:** 4 lbs. **Spring At Rest:** 1.7 lbs.
Options: M, B, V, N, P6 **Maximum Stroke:** 23"
 For B option add 0.063
 For M option add 0.125
 For MB combination add 0.125

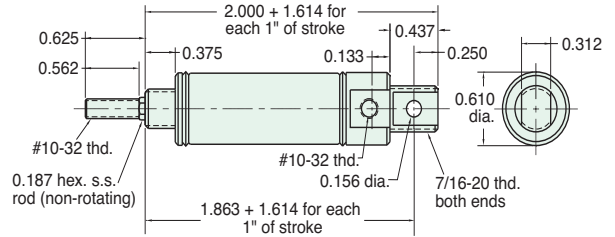


Furnished without nut(s). See Chart on Page 19.

USR-09-□-□

Single Acting



Mount: Universal **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Rotating Rod **Spring Compressed:** 4 lbs. **Spring At Rest:** 1.7 lbs.
Options: M, B, V, N, P6 **Maximum Stroke:** 23"
 For B option add 0.063
 For M option add 0.125
 For MB combination add 0.125

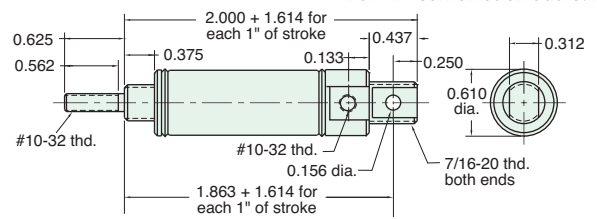


Furnished without nut(s). See Chart on Page 19.

SSN-09-□-□

Single Acting



Mount: Stud **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Non-Rotating Rod **Spring Compressed:** 4 lbs. **Spring At Rest:** 1.7 lbs.
Options: M, B, V, N **Maximum Stroke:** 23"
 For B option add 0.063
 For M option add 0.125
 For MB combination add 0.125

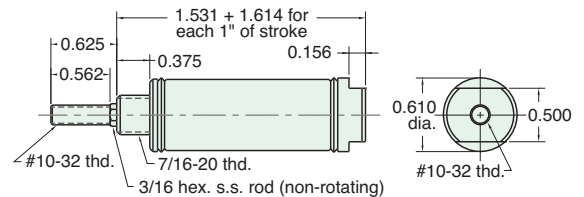


Nut included, but not shown on drawing

SSR-09-□-□

Single Acting



Mount: Stud **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Rotating Rod **Spring Compressed:** 4 lbs. **Spring At Rest:** 1.7 lbs.
Options: M, B, V, N **Maximum Stroke:** 23"
 For B option add 0.063
 For M option add 0.125
 For MB combination add 0.125

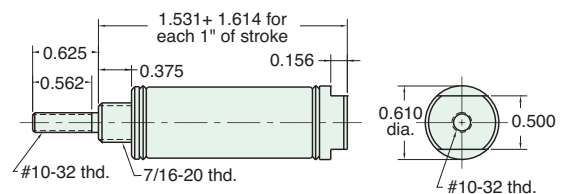

Nut included, but not shown on drawing