

# 3/4" BORE STAINLESS STEEL CYLINDER




## UDR-12-□-□

Double Acting



**Mount:** Universal      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4", 5", 6", 8", 10", 12"  
**Type:** Rotating rod      **Maximum Stroke:** 41"  
**Options:** C, F, R, M, B, W, V, N, P2, P3, P4, P5, P6, P7, P8      For B option add 0.500

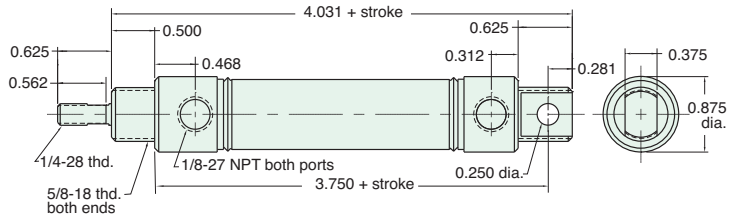


Furnished without nut(s). See Chart on Page 29.

## SDR-12-□-□

Double Acting



**Mount:** Stud      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4", 5", 6"  
**Type:** Rotating Rod      **Maximum Stroke:** 42"  
**Options:** C, F, R, M, B, W, V, N, S, P6, P7, P8      For B option add 0.500  
 For C, F, R & S options add 0.437

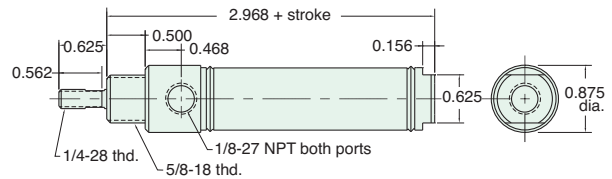

For harsh environments, refer to [pages 64 through 69](#) for Clippard's Corrosion-Resistant Stainless Steel 3/4" cylinders.

Nuts included, but not shown on drawing  
 C, F, & R options use side ported rear head


## SDD-12-□-□

Double Acting



**NEW** All Stainless Steel line now available!  
 See [pages 66 - 70](#)

**Mount:** Stud      **Standard Stroke Lengths:** 1", 2", 3", 4", 5", 6"  
**Type:** Double Rod      **Maximum Stroke:** 20"  
**Options:** C, F, M, B, W, V, N, P6, P7, P8      For B option add 0.500

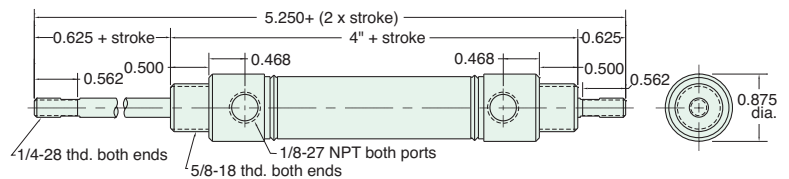


Nuts included, but not shown on drawing

## SDH-12-□-□

Double Acting



**Mount:** Stud      **Standard Stroke Lengths:** 1", 2", 3", 4", 5", 6"  
**Type:** Hollow Rod      **Maximum Stroke:** 20"  
**Options:** C, F, R, M, B, W, V, N, P6, P7, P8      For B option add 0.500

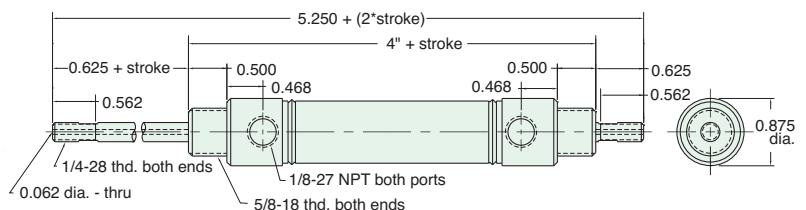

Nuts included, but not shown on drawing