

# 1 1/4" BORE STAINLESS STEEL CYLINDER




**Note:** The 1 1/4" bore is also available with a 7/16-20 threaded rod. Order -LR option.

## SSN-20-□-□

Single Acting

**Mount:** Stud      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Non-Rotating Rod      **Spring Compressed:** 10 lbs.      **Spring At Rest:** 4.5 lbs.  
**Options:** M, B, V, N, S, H      **Maximum Stroke:** 23"      For M option add 0.125  
 For S option add 0.312

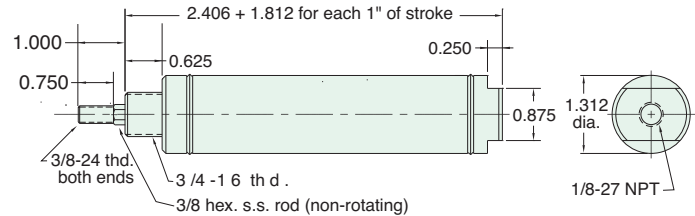


Nut included, but not shown on drawing

## SSR-20-□-□

Single Acting

**Mount:** Stud      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 10 lbs.      **Spring At Rest:** 4.5 lbs.  
**Options:** M, B, V, N, S, H      **Maximum Stroke:** 23"      For M option add 0.125  
 For S option add 0.312

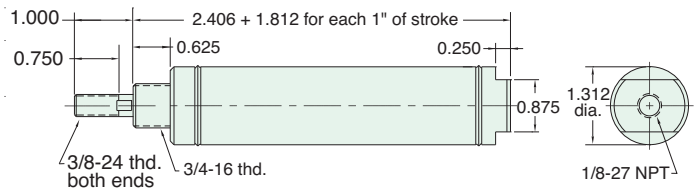


Nut included, but not shown on drawing

## USN-20-□-□

Single Acting

**Mount:** Universal      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Non-Rotating Rod      **Spring Compressed:** 10 lbs.      **Spring At Rest:** 4.5 lbs.  
**Options:** M, B, V, N, H, P6      **Maximum Stroke:** 22"      For M option add 0.125

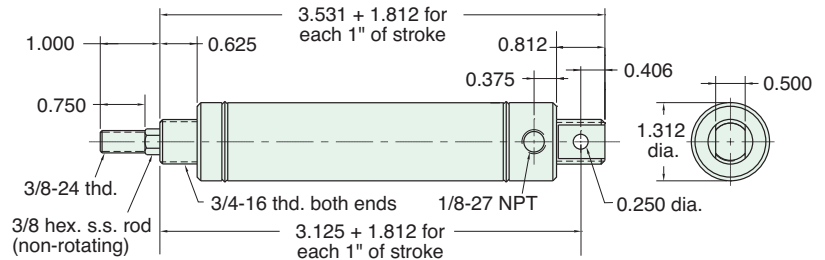


Furnished without nut(s). See Chart on Page 43.

## USR-20-□-□

Single Acting

**Mount:** Universal      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 10 lbs.      **Spring At Rest:** 4.5 lbs.  
**Options:** M, B, V, N, H, P6      **Maximum Stroke:** 22"      For M option add 0.125

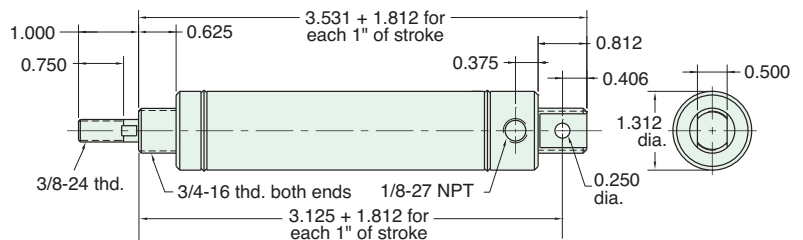

Furnished without nut(s). See Chart on Page 43.