





MAXIMATIC® FILTER-REGULATOR-LUBRICATORS

Flow Rate vs. Set Point Pressure @ 100 psig Supply Pressure


- Find the required flow rate in the graphs below.
- Determine the desired set point pressure.
- With a suggested pressure drop of <15 psig, determine which FRL size provides the required flow rate.

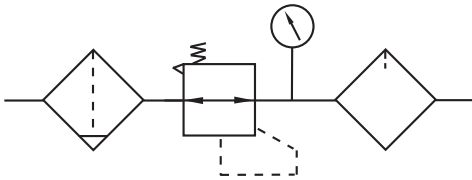


MMFRL-1 & MMFRLS-1 Series

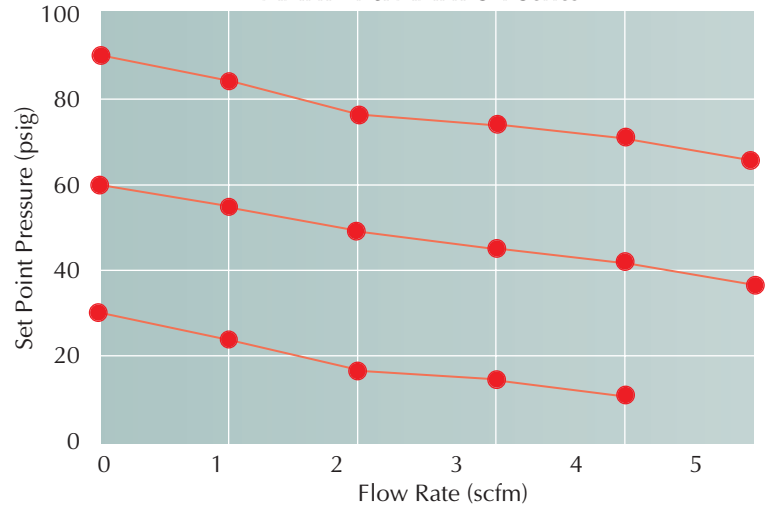


MMFRL-2 & MMFRLS-2 Series

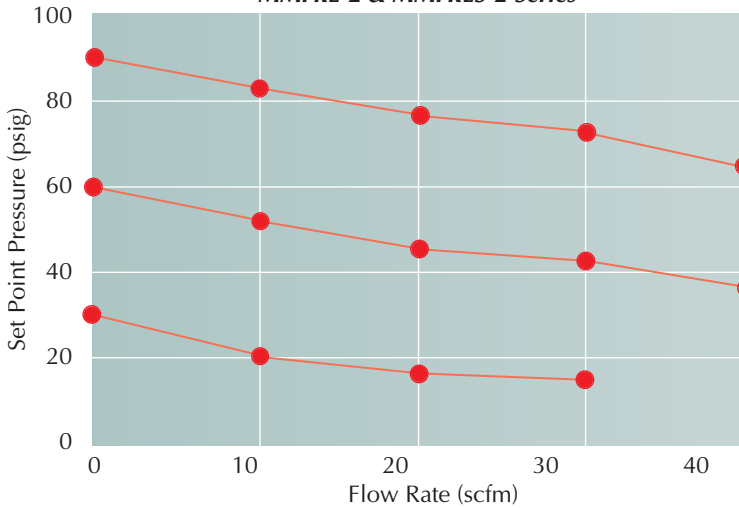

MMFRL-3 & MMFRLS-3 Series

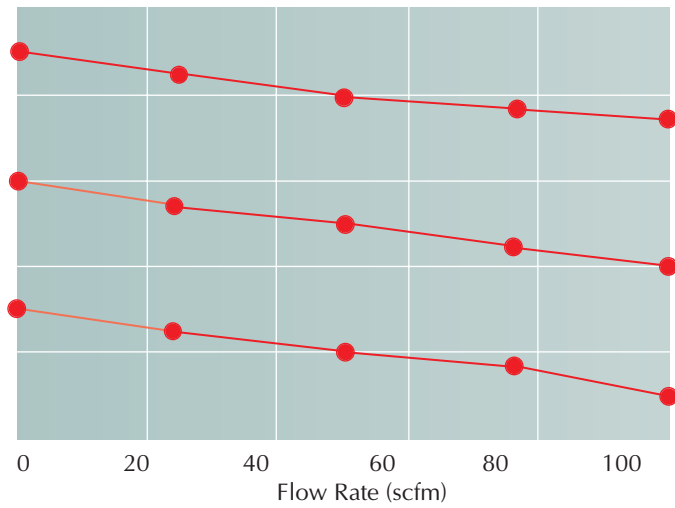

MMFRL-4 & MMFRLS-4

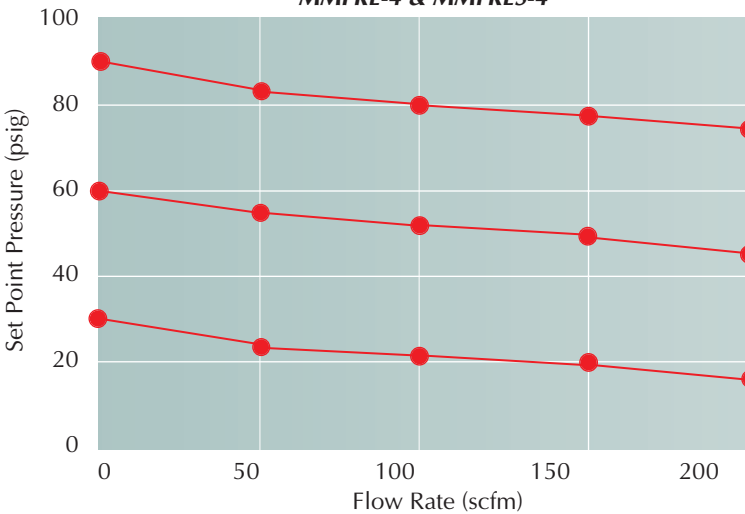

MMFRL-5 & MMFRLS-5 Series

