


All fittings are Brass unless otherwise noted


## Brass Mufflers

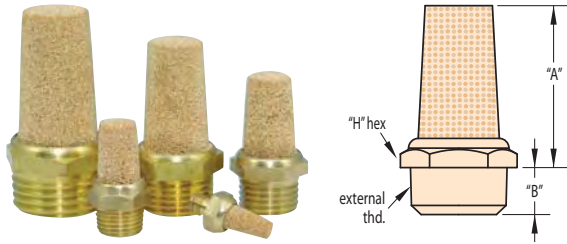

External Thd.	Order No.	"A"	"B"	"H" Hex.
#10-32	11130-N	0.560"	0.195"	8 mm
1/8" NPT	11130-P	0.686"	0.259"	12 mm
1/4" NPT	11130-Q	0.860"	0.300"	14 mm
3/8" NPT	11130-W	1.129"	0.330"	17 mm
1/2" NPT	11130-Z	1.331"	0.386"	21 mm

Sintered bronze muffer (40 micron), Nitrile gasket furnished on #11130-N only

## 1/8" NPT Muffler

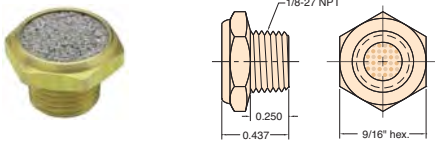

Order No.	Description
15080	1/8" NPT Muffler

**Material:** Solid brass body; sintered stainless steel insert (100 micron)


**Thread:** 1/8" NPT

**Options:** (-ENP)

**Use:** To muffle exhaust for quiet system operation



## #10-32 ENP Muffler

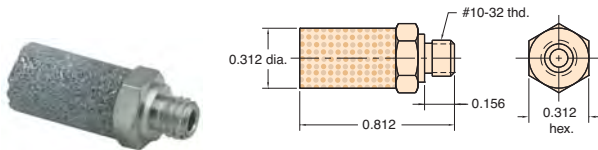


Order No.	Description
15070	#10-32 Muffler

**Material:** Electroless nickel plated brass body sintered stainless steel muffer (60 micron)

**Gasket:** Nitrile furnished

**Use:** To muffle exhaust for quiet system operation

## 12-Port Manifold

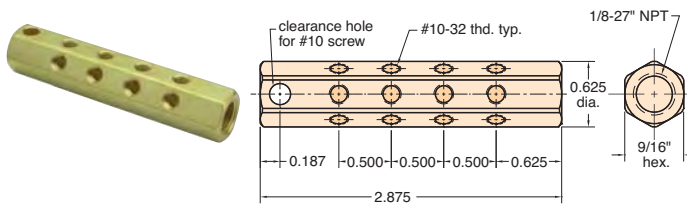

Order No.
MAN-12

**Material:** Brass

**Options:** (-ENP)


**Thread:** Tapped ports: 1/8" standard pipe tapped inlet

**Mounting:** 13/64" diameter mounting hole

**Use:** May be mounted on jigs, fixtures or machinery to provide up to 12 convenient #10-32 outlets from one standard 1/8" pipe connection; may be used with any Clippard #10-32 fittings, quick connects and many other devices; unused ports can be plugged with screw plug 11755



## 6-Port Rotary Manifold

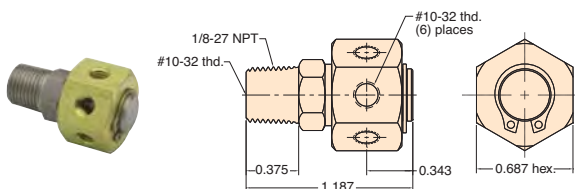

Order No.
MRM-6

**Material:** Brass and stainless steel

**Thread:** 1/8" NPT for inlet is also tapped #10-32; outlet consists of 6 ports tapped #10-32

**Seals:** Nitrile o-ring furnished

**Working Range:** 250 psig max.

**Air Flow:** 5.9 scfm @ 50 psig

**Use:** May be used either as a rotary joint or as a stationary manifold; ideal for distributing air or liquid from center column onto a rotary index table; unused ports may be plugged with screw plug 11755 and gasket

Low RPM applications

