

10 Directional Control Valves – Sub-Miniature Spool Valves


M-SMTV/M-SMAV Sub-Miniature Spool Valves

3/2 Toggle and Push Button Valves have 1/16" tube barbs. The push button valve can be used as a Normally-Open or Normally-Closed 3/2. The miniature limit valve is designed to serve as a mechanical stop when the stem is fully depressed.

| | |
|---|---|
| Medium: Air | Air Flow: 40 L/min @ 7 bar |
| Stem Travel: 1.6 mm | Force For Full Stem Travel: M-SMAV: 0.5 kg M-SMTV: 0.7 kg nominal |
| Input Pressure: 7 bar max. | Spool Material: Delrin® acetal resin |
| Ports: M 2.5 with 1/16" ID Hose Barbs | |



Pressure vs. Flow

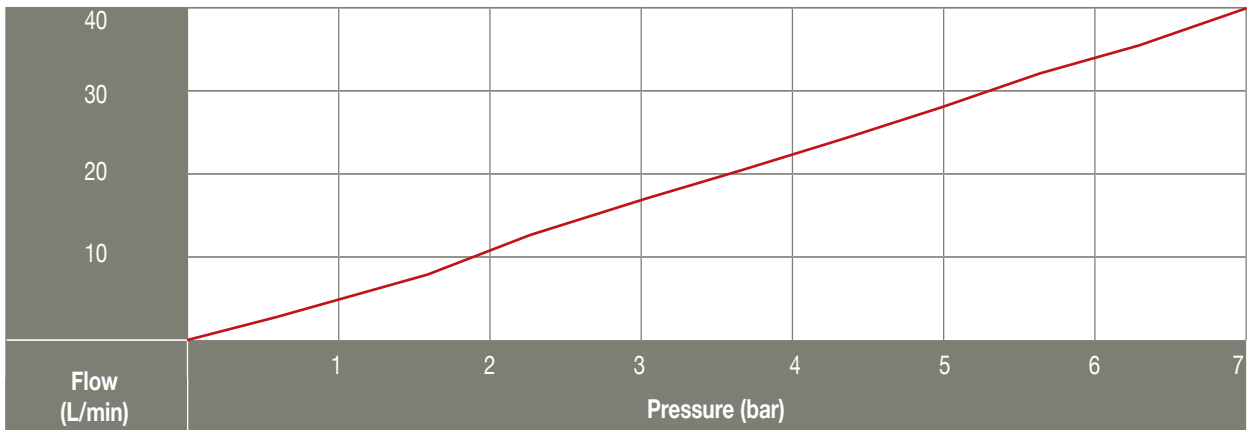

- Subminiature size spool design
- Multiple colored buttons for M-SMAV