
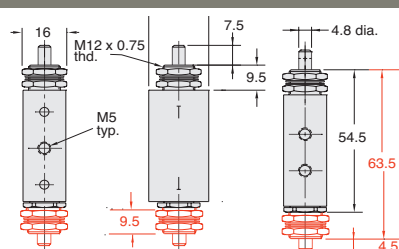


# Directional Control Valves – M-FV M5 & G1/8 Spool Valves 25

**3/2, M5 Valves**






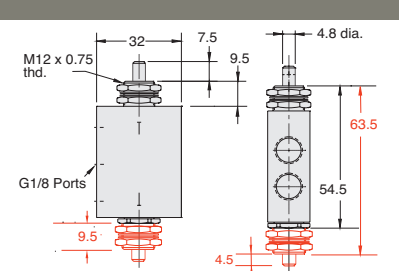
(M-FV-3D shown)

| Port(s)   | Actuation         | 3/2            |
|-----------|-------------------|----------------|
| M5        | Spring Return     | M-FV-3         |
| <b>M5</b> | <b>2-Position</b> | <b>M-FV-3D</b> |

Air Flow: 170 L/min @ 3.5 bar; 285 L/min @ 7 bar

**3/2, G1/8 Valves**





(M-FV-3P shown)

| Port(s)     | Actuation         | 3/2             |
|-------------|-------------------|-----------------|
| G1/8        | Spring Return     | M-FV-3P         |
| <b>G1/8</b> | <b>2-Position</b> | <b>M-FV-3DP</b> |

Air Flow: 185 L/min @ 3.5 bar; 300 L/min @ 7 bar



For high temperature applications (up to +200°C), or those that require special seals for chemical compatibility, Clippard offers optional FKM seals.

**options** (suffix)  
 ENP Plating "-ENP" • FKM Seals "-V"