

## M-TV Series 5/3 Toggle Valves

5/2 toggle valve with outlet ports open to atmosphere in the center position. The valve can be spring centered, 3 position detent or the “DM” provides a detent on one side and spring return on the other side.

The M-TV-DM model can be used on the momentary side as a “jog” or “manual” control, and with the detented side for “automatic” or “run” mode.

Medium:  
Air

Force to Rotate Toggle:  
0.22 kg nominal

Input Pressure:  
10 bar max.


Mounting Cartridge Style:  
M16 x 1 thread. Nut and lockwashers furnished.

Air Flow:  
125 L/min @ 3.5 bar; 210 L/min @ 7 bar

Force to Rotate Toggle:  
0.22 kg nominal



## Pressure vs. Flow

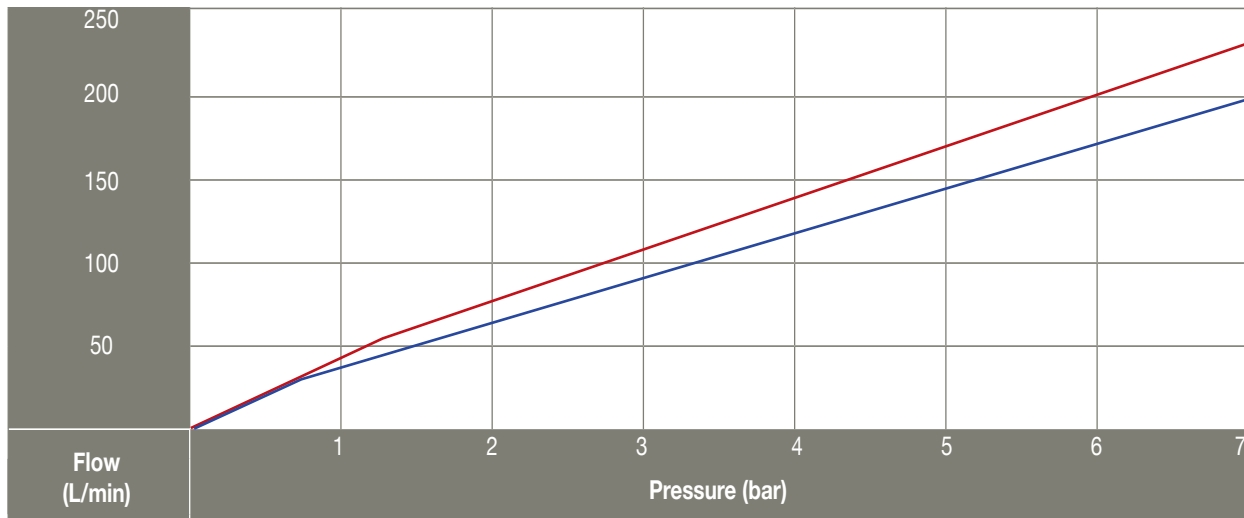

- Designed for use with Clippard manual, air pilot, electrical or mechanical actuators, or combinations

— M-TV-2M/3M  
— M-TV-2S/3S  
— M-TVO-2M/3M