

Pilot-Operated Check Valves

Pilot-Operated Check Valves work as standard check valves, but can be opened with an air pilot signal to permit free flow in the normally “checked” direction. The Clippard Pilot-Operated Check Valve provides the user with a reliable method to check flow in one direction, with the ability to remotely signal a free flow through the valve. Ideal for any circuit that requires this useful function—all in one valve that is easy to connect!

- High flow valve means low pressure drop
- Uses Clippard’s superior poppet design
- Variety of port configurations available
- “Auxiliary” port allows ease of plumbing
- Side port (port 2) rotates for ease of positioning

Medium:
Air, Water or Oil

Pressure Range:
Up to 21 bar


Temperature Range:
0 to 110°C

Materials:
ENP brass, anodized aluminium, stainless steel,
Nitrile seals



For specialty options such as various seal materials, manual override, or specific pilot to supply ratios, please consult factory.

Minimum Pilot-to-Supply Pressure

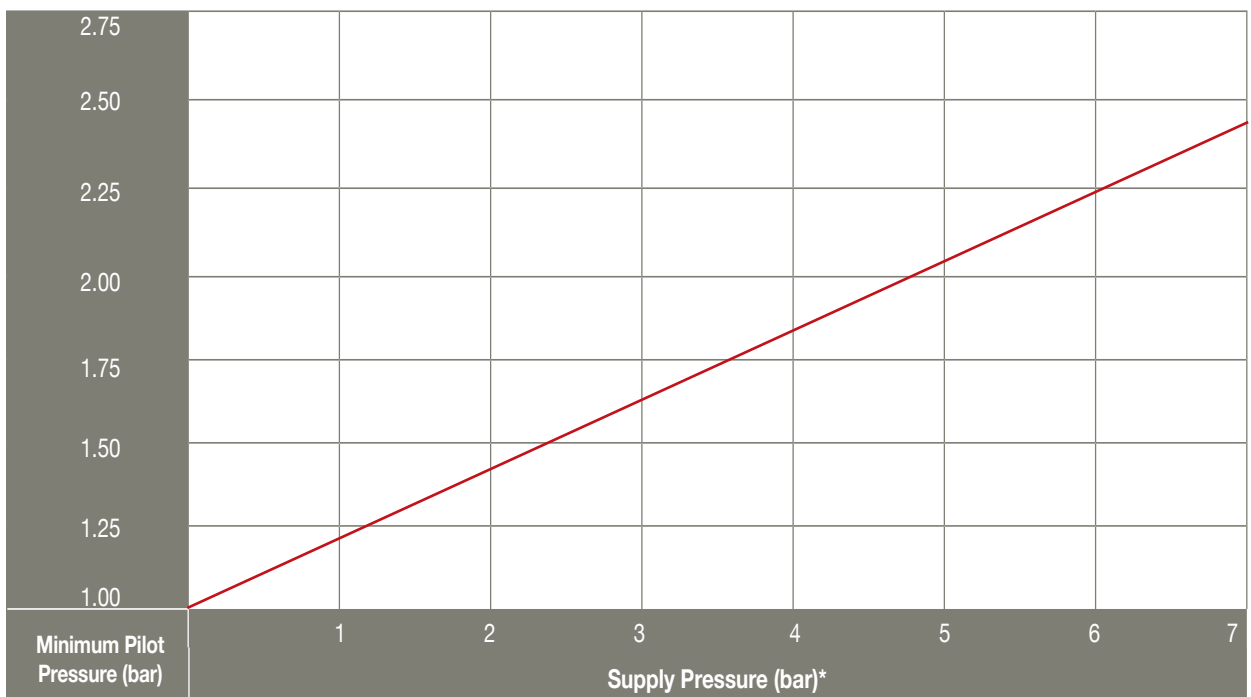

* For Pilot-to-Supply pressure above 7 bar, please contact the factory