


# 9/16" BORE STAINLESS STEEL CYLINDER



## SDD-09-□-□

Double Acting

**Mount:** Stud      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Double Rod      **Maximum Stroke:** 20"  
**Options:** M, B, V, N, P6, P7, P8      For B option add 0.125

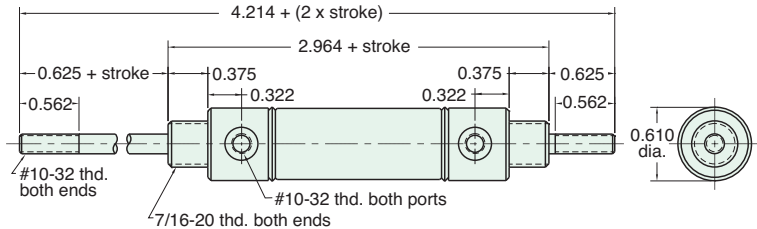


Nuts included, but not shown on drawing

## SRR-09-□-□

Reverse Acting

**Mount:** Stud      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 4 lbs.      **Spring At Rest:** 1.7 lbs.  
**Options:** M, B, V, N      **Maximum Stroke:** 15"      For B option add 0.063  
 For M option add 0.125  
 For MB combination add 0.125

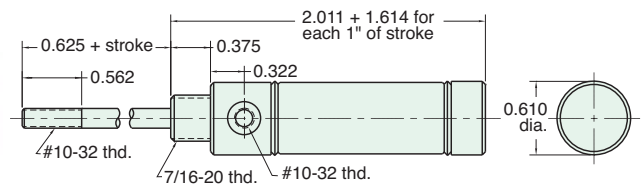


Nut included, but not shown on drawing

## URR-09-□-□

Reverse Acting

**Mount:** Universal      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 4 lbs.      **Spring At Rest:** 1.7 lbs.  
**Options:** M, B, V, N, P2      **Maximum Stroke:** 14"      For B option add 0.063  
 For M option add 0.125  
 For MB combination add 0.125

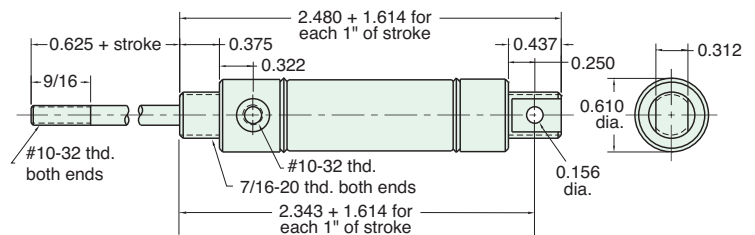


Furnished without nut(s). See Chart on Page 19.

## SDR-09-□-□

Double Acting

**Mount:** Stud      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod      **Maximum Stroke:** 43"  
**Options:** M, B, V, N, P6, P7, P8      For B option add 0.125  
 For MB combination add 0.125

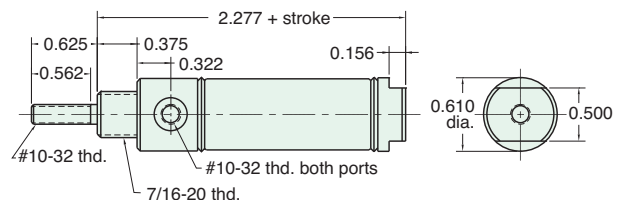

Nut included, but not shown on drawing