


# 2-WAY NORMALLY-CLOSED HIGH FLOW VALVES, IN-LINE & MANIFOLD MOUNT

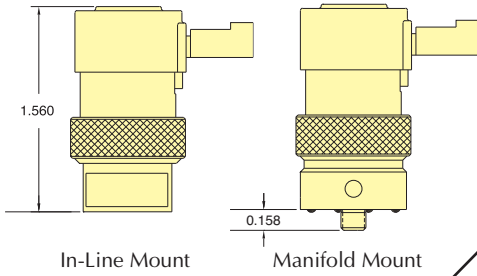

Part No.

		Pressure Range			Voltage		In-Line Mount	Manifold Mount
		Vac. to 105 psig	Vac. to 50 psig	Vac. to 25 psig	12 VDC	24 VDC		
 0.025" Pin Connector		•			•		* <a href="#">ECR-2-12</a>	* <a href="#">ECR-2M-12</a>
		•			•		* <a href="#">ECR-2-24</a>	* <a href="#">ECR-2M-24</a>
			•		•		* <a href="#">ECR-2-12-L</a>	* <a href="#">ECR-2M-12-L</a>
			•		•		* <a href="#">ECR-2-24-L</a>	* <a href="#">ECR-2M-24-L</a>
				•	•		* <a href="#">ECR-2-12-H</a>	* <a href="#">ECR-2M-12-H</a>
				•	•	* <a href="#">ECR-2-24-H</a>	* <a href="#">ECR-2M-24-H</a>	
 Spade Terminals		•			•		* <a href="#">ETR-2-12</a>	* <a href="#">ETR-2M-12</a>
		•			•		* <a href="#">ETR-2-24</a>	* <a href="#">ETR-2M-24</a>
			•		•		* <a href="#">ETR-2-12-L</a>	* <a href="#">ETR-2M-12-L</a>
			•		•		* <a href="#">ETR-2-24-L</a>	* <a href="#">ETR-2M-24-L</a>
				•	•		* <a href="#">ETR-2-12-H</a>	* <a href="#">ETR-2M-12-H</a>
				•	•	* <a href="#">ETR-2-24-H</a>	* <a href="#">ETR-2M-24-H</a>	
 Wire Leads Side (Radial)		•			•		* <a href="#">EVR-2-12</a>	* <a href="#">EVR-2M-12</a>
		•			•		* <a href="#">EVR-2-24</a>	* <a href="#">EVR-2M-24</a>
			•		•		* <a href="#">EVR-2-12-L</a>	* <a href="#">EVR-2M-12-L</a>
			•		•		* <a href="#">EVR-2-24-L</a>	* <a href="#">EVR-2M-24-L</a>
				•	•		* <a href="#">EVR-2-12-H</a>	* <a href="#">EVR-2M-12-H</a>
				•	•	* <a href="#">EVR-2-24-H</a>	* <a href="#">EVR-2M-24-H</a>	
 Wire Leads Top (Axial)		•			•		* <a href="#">EWR-2-12</a>	* <a href="#">EWR-2M-12</a>
		•			•		* <a href="#">EWR-2-24</a>	* <a href="#">EWR-2M-24</a>
			•		•		* <a href="#">EWR-2-12-L</a>	* <a href="#">EWR-2M-12-L</a>
			•		•		* <a href="#">EWR-2-24-L</a>	* <a href="#">EWR-2M-24-L</a>
				•	•		* <a href="#">EWR-2-12-H</a>	* <a href="#">EWR-2M-12-H</a>
				•	•	* <a href="#">EWR-2-24-H</a>	* <a href="#">EWR-2M-24-H</a>	

**Medium:** Clean, dry air (40 micron filter)

**Power Consumption:** 1.2 watt

**Temperature Range:** 32 to 150°F

**Response:** 10 milliseconds (nominal)

**Operating Range:** ±10% of rated voltage


**Ports:** #10-32



Valve Series (*)	Standard	Non-Standard
Standard Analytical Series**	(blank) A-	See Pages 179 & 180 for further information
<b>Options (add to end of Part No.)</b>		
FKM Seals	-V	
EPR Seals		-E
Silicone Seals		-S
Diode		-D

See Page 181 for mounting options

\*\* Available on manifold mount valves only

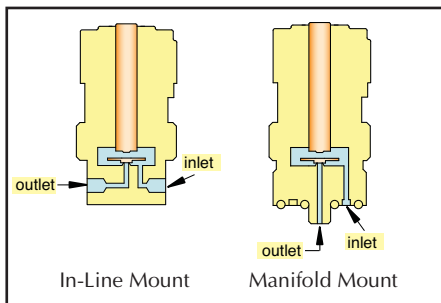

Pressure Range	Suffix	Air Flow
28" Hg Vac. to 100 psig	(blank)	1.4 scfm @ 100 psig
28" Hg Vac. to 50 psig	-L	1.1 scfm @ 50 psig
28" Hg Vac. to 25 psig	-H	0.95 scfm @ 25 psig

Metric line available. Visit [www.clippard.com](http://www.clippard.com)