



# MINIMATIC® QUICK CONNECT


## Push-Quick Fittings with MJQC Quick-Connect Port




These 1/4" fittings combine the quick, easy Push-Quick functionality with the flexibility and security of the Quick-Connect series with no circuit interruption. MJQC Quick-Connect Caps (ordered separately on previous page) attach to the threaded port allowing for a variety of uses.

Part No.	Description
<a href="#">PQ-RT08QC</a>	Run Tee with 3/8-24 Thread
<a href="#">PQ-BT08QC</a>	Branch Tee with 3/8-24 Thread

- Serves as an easy connection point for temporary functions/circuitry
- Quickly test for air flow
- Easy connection to valves, cylinders, hose, etc.
- Check air pressure via a gauge
- Use as a dump valve/vent

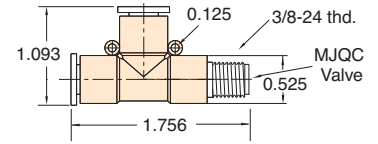


**PQ-RT08QC**



**PQ-BT08QC**

## Quick Connect Assembly

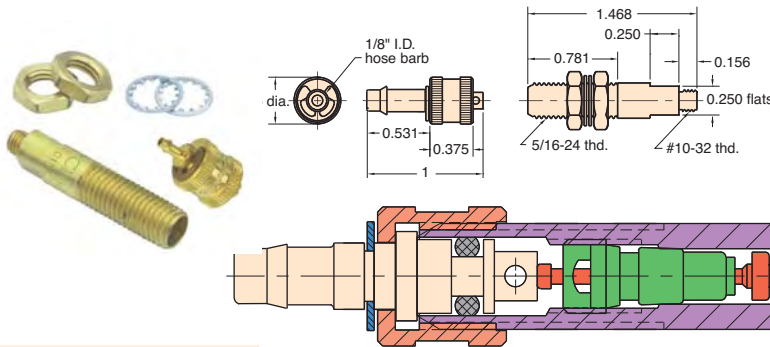

Part No.	Description
<a href="#">MQC-2S</a>	QC Assembly

**Type:** One way check quick connect assembly of valve body MQC-V2 and hose connector MQC-F

**Material:** Body- brass, Stem- brass


**Seals:** Nitrile

**Working Pressure:** 0 to 300 psig

**Air Flow:** 3.0 scfm @ 50 psig  
5.8 scfm @ 100 psig

**Triple Barb:** Order [MQC-2](#)

## Quick Connect Assembly

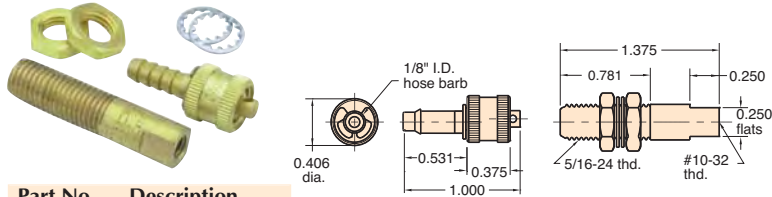

Part No.	Description
<a href="#">MQC-3S</a>	QC Assembly

**Type:** One way check quick connect assembly of valve body MQC-V3 and hose connector MQC-F

**Material:** Body- brass, Stem- brass

**Seals:** Nitrile

**Working Pressure:** 0 to 300 psig


**Air Flow:** 3.0 scfm @ 50 psig  
5.8 scfm @ 100 psig

**Triple Barb:** Order [MQC-3](#)

## Valve Body



Part No.	Description
<a href="#">MQC-V2</a>	Valve Body

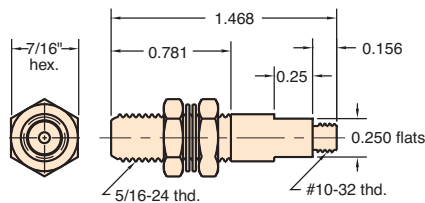

**Material:** Brass

**Thread:** #10-32 male

**Mounting:** In panel or bracket to 1/4" thick with two 7/16" mounting nuts and lockwashers furnished; also screws directly into operative unit or manifold

**Seals:** Nitrile

**Use:** For connection with external shut-off to external hose, use hose connectors: MQC-F, MQC-FT, MQC-F2

**Options:** (-ENP)