

# 5/8" BORE STAINLESS STEEL CYLINDER




## USN-10-□-□

Single Acting



**Mount:** Universal    **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Non-Rotating Rod    **Spring Compressed:** 4 lbs.    **Spring At Rest:** 1.3 lbs.  
**Options:** M, B, V, N, H, P6    **Maximum Stroke:** 23"    For B option add 0.500  
 For M option add 0.312

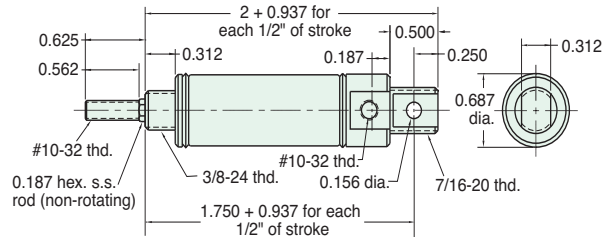


Furnished without nut(s). See Chart on Page 23.

## USR-10-□-□

Single Acting



**Mount:** Universal    **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod    **Spring Compressed:** 4 lbs.    **Spring At Rest:** 1.3 lbs.  
**Options:** M, B, V, N, H, P6    **Maximum Stroke:** 23"    For B option add 0.500  
 For M option add 0.312

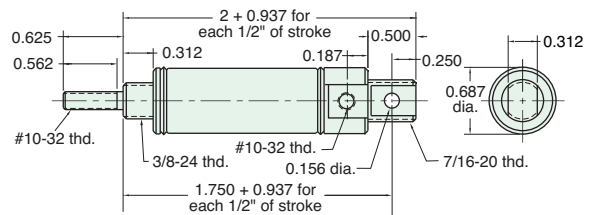


Furnished without nut(s). See Chart on Page 23.

## SSN-10-□-□

Single Acting



**Mount:** Stud    **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Non-Rotating Rod    **Spring Compressed:** 4 lbs.    **Spring At Rest:** 1.3 lbs.  
**Options:** M, B, V, N, S, H    **Maximum Stroke:** 23"    For B option add 0.500  
 For M option add 0.312

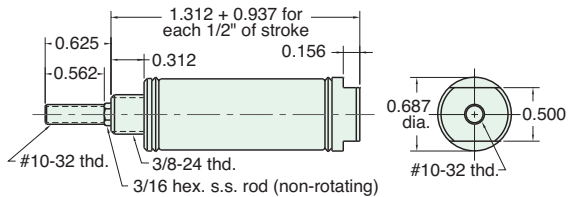


Nut included, but not shown on drawing

## SSR-10-□-□

Single Acting



**Mount:** Stud    **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod    **Spring Compressed:** 4 lbs.    **Spring At Rest:** 1.3 lbs.  
**Options:** M, B, W, V, N, S, H    **Maximum Stroke:** 23"    For B option add 0.500  
 For M option add 0.312

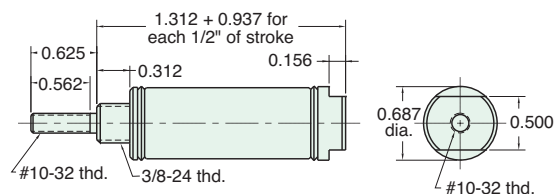

Nut included, but not shown on drawing