


# 1 1/16" BORE STAINLESS STEEL CYLINDER



## FSR-17-□-□

Single Acting


**Mount:** Front      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 7 lbs. **Spring At Rest:** 2 lbs.  
**Options:** M, B, W, V, N, S, H      **Maximum Stroke:** 27"      For M option add 0.125  
 For S option add 0.250

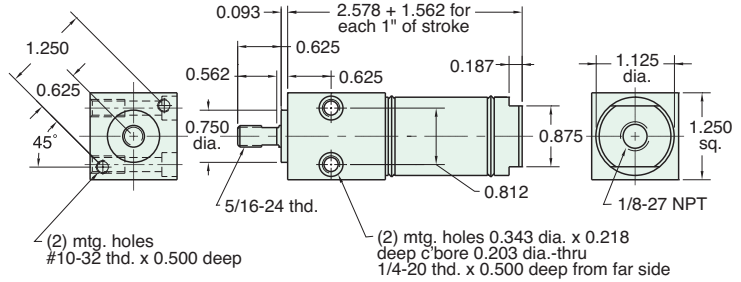

## SSN-17-□-□

Single Acting

**Mount:** Stud      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Non-Rotating Rod      **Spring Compressed:** 7 lbs. **Spring At Rest:** 2 lbs.  
**Options:** M, B, V, N, S, H      **Maximum Stroke:** 27"      For M option add 0.125  
 For S option add 0.250

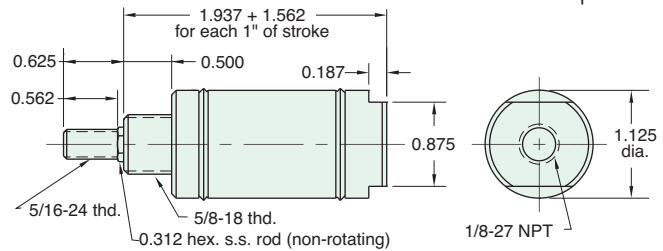


Nut included, but not shown on drawing

## SSR-17-□-□

Single Acting

**Mount:** Stud      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 7 lbs. **Spring At Rest:** 2 lbs.  
**Options:** M, B, W, V, N, S, H      **Maximum Stroke:** 27"      For M option add 0.125  
 For S option add 0.250

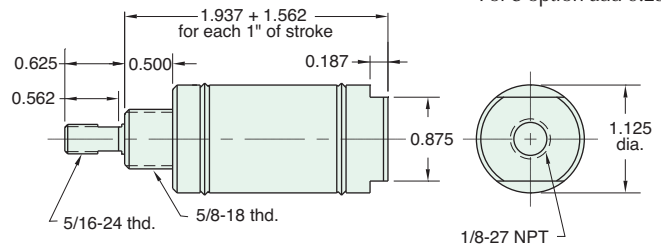

Nut included, but not shown on drawing

## TSR-17-□-□

Single Acting

**Mount:** Trunnion      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 7 lbs. **Spring At Rest:** 2 lbs.  
**Options:** M, B, W, V, N, S, H      **Maximum Stroke:** 26"      For M option add 0.125  
 For S option add 0.250

