



# 1 1/4" BORE STAINLESS STEEL CYLINDER


**Note:** The 1 1/4" bore is also available with a 7/16-20 threaded rod. Order -LR option.

## SDR-20-□-□

Double Acting



**Mount:** Stud      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4", 5", 6"  
**Type:** Rotating Rod      **Maximum Stroke:** 41"  
**Options:** C, F, R, M, B, W, V, N, S, P6, P7, P8      For C, F, R and S option add 0.312  
For CM, FM, RM and SM options add 0.625

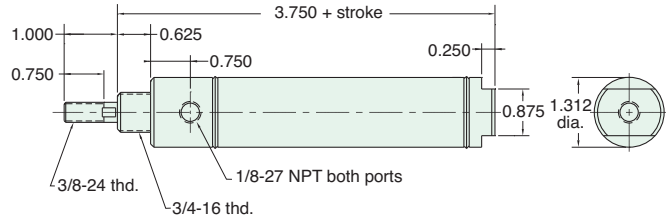


Nut included, but not shown on drawing  
C, F, & R options use side ported rear head

## UDR-20-□-□

Double Acting



**Mount:** Universal      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4", 6", 8", 10", 12"  
**Type:** Rotating Rod      **Maximum Stroke:** 40"  
**Options:** C, F, R, M, B, W, V, N, P2, P3, P4, P5, P6, P7, P8      For CM, FM and RM  
options add 0.312

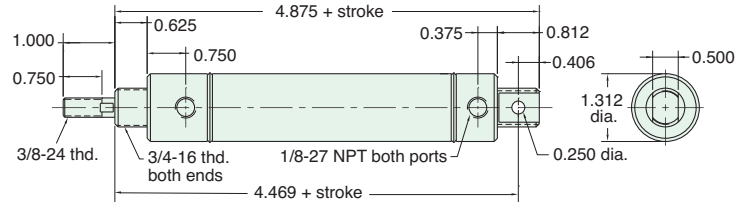


Furnished without nut(s). See Chart on Page 43.

## SDD-20-□-□

Double Acting



**Mount:** Stud      **Standard Stroke Lengths:** 1", 2", 3", 4", 5", 6"  
**Type:** Double Rod      **Maximum Stroke:** 19"  
**Options:** C, F, M, B, W, V, N, P6, P7, P8      For CM and FM options  
add 0.312

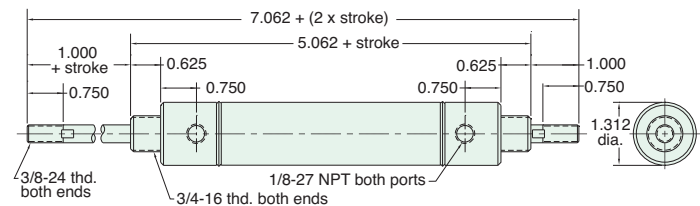


Nuts included, but not shown on drawing

## SRR-20-□-□

Reverse Acting



**Mount:** Stud      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 10 lbs. **Spring At Rest:** 4.5 lbs.  
**Options:** M, B, W, V, N, H      **Maximum Stroke:** 14"      For M option add 0.125

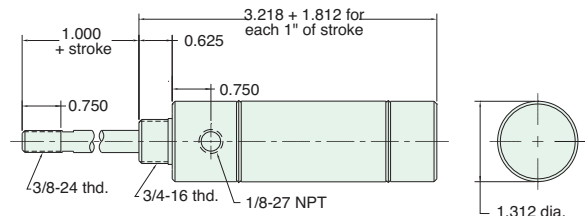

Nuts included, but not shown on drawing