


# 2" BORE STAINLESS STEEL CYLINDER



## SSR-32-□-□

Single Acting

**Mount:** Stud      **Standard Stroke Lengths:** 1", 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 30 lbs. **Spring At Rest:** 15 lbs.  
**Options:** M, B, W, V, N, S      **Maximum Stroke:** 20"      For M option add 0.125  
 For S option add 0.375

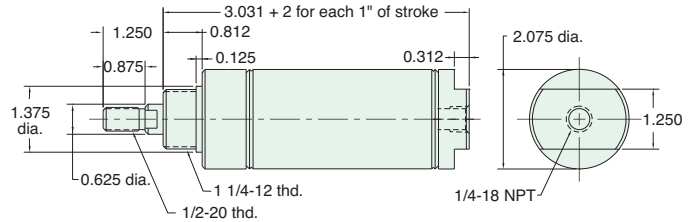


Nut included, but not shown on drawing

## USR-32-□-□

Single Acting

**Mount:** Universal      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 30 lbs. **Spring At Rest:** 15 lbs.  
**Options:** M, B, W, V, N, P6      **Maximum Stroke:** 19"      For M option add 0.125

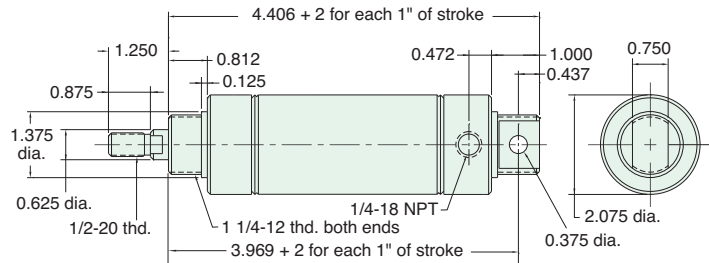


Furnished without nut(s). See Chart on Page 59.

## SDR-32-□-□

Double Acting

**Mount:** Stud      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4", 5", 6"  
**Type:** Rotating Rod      **Maximum Stroke:** 39"  
**Options:** C, F, R, M, B, W, V, N, S, P6, P7, P8      For C, F, R and S options add 0.375

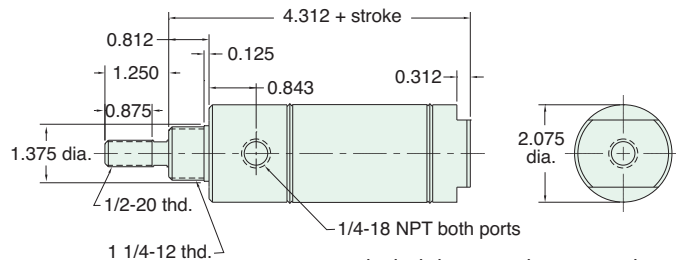

Nut included, but not shown on drawing  
 C, F, & R options use side ported rear head


## UDR-32-□-□

Double Acting

**Mount:** Universal      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4", 5", 6", 7", 8", 10", 12"  
**Type:** Rotating Rod      **Maximum Stroke:** 38"  
**Options:** C, F, R, M, B, W, V, N, P2, P3, P4, P5, P6, P7, P8



*New All Stainless Steel line  
 now available!  
 See pages 66 - 70*

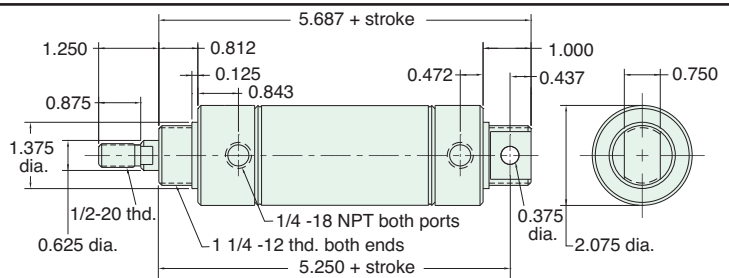

Furnished without nut(s). See Chart on Page 59.