




# AIR VOLUME TANKS

## STAINLESS STEEL



### FEATURES

- Volumes from 1 to 16 cu. in.
- Ten models
- 304 stainless steel tubes
- Precision rolled construction
- Easy to connect, mount and use in your circuits
- Anodized aluminum heads
- Optional 303 stainless steel head with "SS-" styles
- Maximum pressure 250 psig

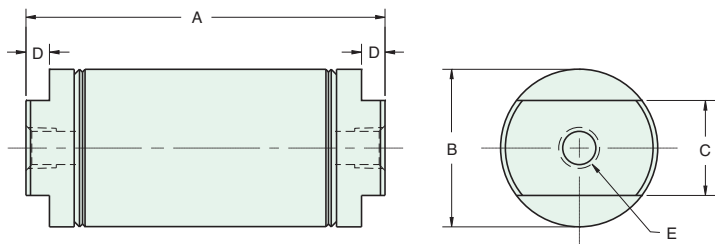


Clippard offers a line of air volume tanks suitable for use with Clippard air components. Using the same quality rolled construction as Clippard stainless steel cylinders, tanks are manufactured to exacting standards. Each is provided with a threaded port at both ends. See chart for volume capacity, dimensions, and port information. Available in standards stainless steel, all stainless steel or polypropylene. For all stainless steel, add prefix of "SS-" to the part number in the chart.

Part Number	Volume Cubic In.	A	B	C	D	E
<a href="#">AVT-12-1</a>	1.0	3.281	0.812	0.625	0.156	1/8 27
<a href="#">AVT-17-2</a>	2.0	3.593	1.125	0.875	0.187	1/8 27
<a href="#">AVT-17-3</a>	3.0	4.718	1.125	0.875	0.187	1/8 27
<a href="#">AVT-24-4</a>	4.0	3.687	1.562	0.875	0.250	1/8 27
<a href="#">AVT-24-6</a>	6.0	4.843	1.562	0.875	0.250	1/8 27
<a href="#">AVT-24-8</a>	8.0	5.968	1.562	0.875	0.250	1/8 27
<a href="#">AVT-24-10</a>	10.0	7.093	1.562	0.875	0.250	1/8 27
<a href="#">AVT-32-12</a>	12.0	5.718	2.062	1.250	0.312	1/4 18
<a href="#">AVT-32-14</a>	14.0	6.343	2.062	1.250	0.312	1/4 18
<a href="#">AVT-32-16</a>	16.0	6.968	2.062	1.250	0.312	1/4 18

For additional corrosion resistance, Clippard can offer air volume tanks with Acetal heads. Call for more information.

Additional models are available upon request

## POLYPROPYLENE

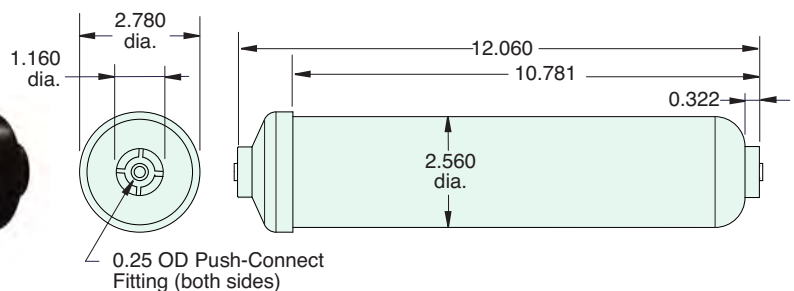

- Maximum pressure 125 psig
- Temperature Range: 35 to 100°F

### Part No.

- [AVT-PP-35](#) 35 Volume Cubic In.
- [AVT-PP-CL](#) Mounting Clip