



Caps with Open Flow Path


Minimatic J-Series quick connect fittings are ideal for use in jigs, fixtures, feeding devices, logic control circuitry and automatic or semi-automatic machinery. Assembly is simple, and the tightening of the knurled cap assures a positive, leakproof, high pressure connection that will stay connected.




Part No. MIQC-CB4 **Description**
1/8" Barb




Part No. MIQC-CFT **Description**
#10-32




Part No. MIQC-CPF **Description**
3/8" Thread

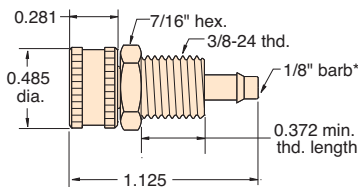

Part No. MIQC-CPB **Description**
1/8" Barb
(supplied with mounting nut and two washers)




Part No. MIQC-CMP **Description**
1/8" NPT




Part No. MIQC-CMQ **Description**
1/4" NPT

Valve Bodies with Shut-Off Valve


Minimatic J-Series quick connect fittings are very compact yet provide a high flow of 14 scfm @ 100 psig. The electroless nickel plated brass body is available with #10-32 threads (M or F), 1/8" NPT threads (M or F), 1/4" NPT threads (M) or a 1/8" hose single barb configuration that is ideal for use with Clippard URH1-0804 polyurethane hose.

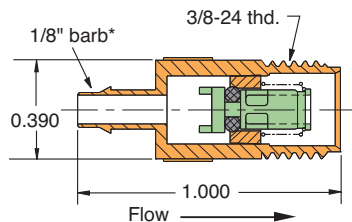


Part No. MIQC-VB4 **Description**
1/8" Barb, 3/8-24 Thd.

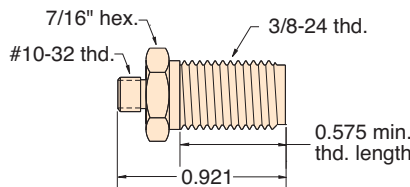


Part No. MIQC-VMT **Description**
#10-32 Male, 3/8-24 Thd.
(supplied with mounting nut and two washers)

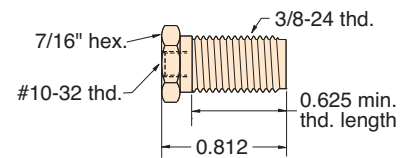


Part No. MIQC-VFT **Description**
#10-32 Female, 3/8-24 Thd.
(supplied with mounting nut and two washers)



Part No. MIQC-VFP **Description**
1/8" NPT Female, 3/8-24 Thd.



Part No. MIQC-VMQ **Description**
1/4" NPT Male, 3/8-24 Thd.

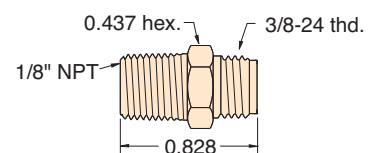

Part No. MIQC-VMP **Description**
1/8" NPT Male, 3/8-24 Thd.

*1/8 Barb - fits 1/8" I.D. hose. Ideal for use with Clippard URH1-0804 polyurethane hose.