



# MODULAR 3-WAY VALVE

## R-301

### 3-Way Valve

#### Features:

- Indicator shows valve in shaded position
- Multiple porting speeds piping
- Micro gap construction - snap action and no blow by
- Balanced design allows speed control at exhausts


#### Performance:

**Flow:** 9 scfm @ 100 psig  
**Pilot Pressure Minimum:** 40 psigs  
**Temperature:** 32 to 180°F  
**Working Pressure:** Vacuum to 150 psig;  
 10.3 bars



#### Description:

R-301 is a 3-way, spring return, fully ported, piloted valve. It can be used Normally-Open, Normally-Closed, as a diverter or as a selector. It can also be used as a 2-way valve by plugging the exhaust ports.

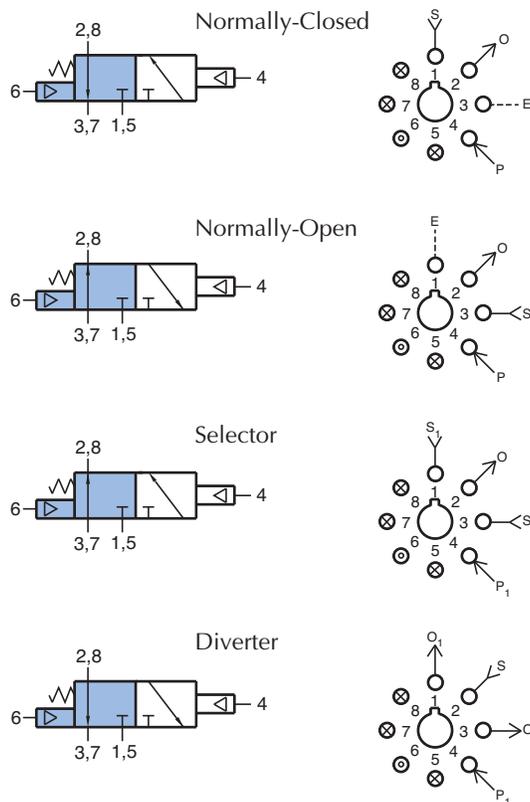

## R-302

### 3-Way Valve

#### Features:

- Indicator shows valve in shaded position
- Multiple porting speeds piping
- Micro gap construction - snap action and no blow by
- Balanced design allows speed control at exhausts

#### Performance:

**Flow:** 9 scfm @ 100 psig  
**Pilot Pressure Minimum:** 20 psig  
**Temperature:** 32 to 180°F  
**Working Pressure:** 0 to 150 psig



#### Description:

R-302 is a 2-position, 3-way, double-piloted, fully-ported valve. It can be used Normally-Open, Normally-Closed, as a 2-position diverter, as a 2-position selector, or as a 2-way valve by plugging the exhaust ports.

