


Part No.	Description
11925	Roller Cam Follower Actuator

Construction:  
Stainless steel with  
nylon roller

Operation:  
Mounts to valve body,  
actuates valve when  
mechanically depressed:  
valve spring provides return

Mounting:  
12.3 mm dia. mounting hole  
fits M12 x 0.75 threaded  
mounting section of valve  
bodies

Note for 11925:		
When mounting on a valve, a space should be provided between the body and the actuator according to the chart to the right:	<p><b>Valve Mtg. Thd.</b>    <b>11925</b></p> <p>6.4 thd. length      1.6</p> <p>9.5 thd. length      4.8</p>	A mounting nut (supplied with valve), mounting bracket or washers should be used to obtain the required spacing.

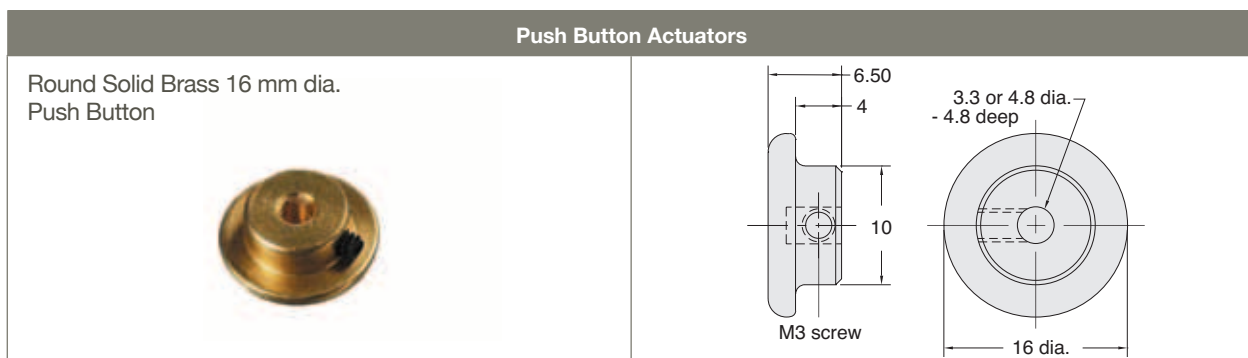

Part No.	Description
M-11916-1	16 mm Brass Push Button, 3.2 Stem
M-11916-2	16 mm Brass Push Button, 4.8 Stem

Use:  
Mounts directly on valve  
stem for manual operation  
of valve; prevents over-  
travel of valve stem by  
providing a positive stop

Mounting:  
3.2 or 4.8 mm dia. mounting  
hole fits valve stems; locks  
in place by set screw