

3/2 Normally-Closed Amplifier Valves

3/2 Valve Normally-Closed Interface amplifies very low pressure air-jet sensing signals to working power levels

Medium:
Air

Response Time:
10 milliseconds dead headed

Material:
Anodized aluminum body, Nitrile diaphragms

Operating Speed:
50 Hz

Input Pressure:
2 to 7 bar



Bleed:
3 L/min @ 7 bar

Air Flow:
625 L/min @ 7 bar

Ports:
Load - G1/8 female
Supply - G1/8 female
Exhaust - G1/8 female
Control - M5 female

Pilot Pressure:
4" H₂O (10 mbar) @ 7 bar

Maximum Allowable Pilot Pressure:
35 mbar

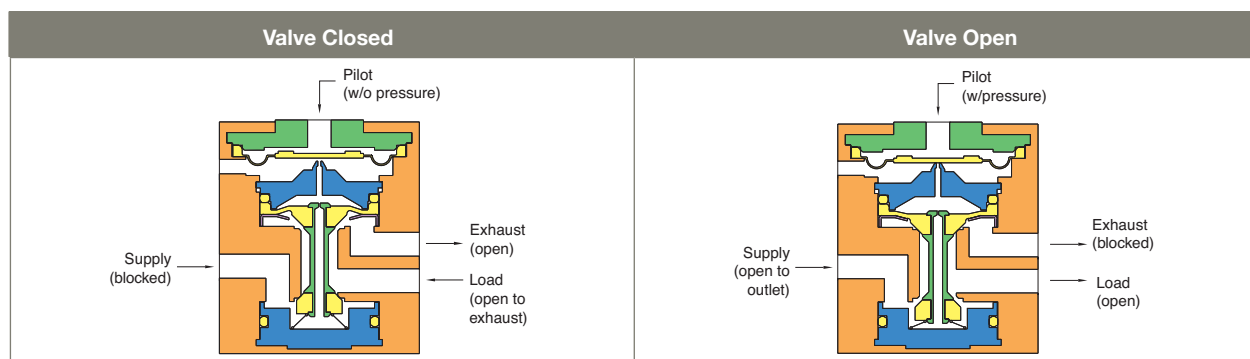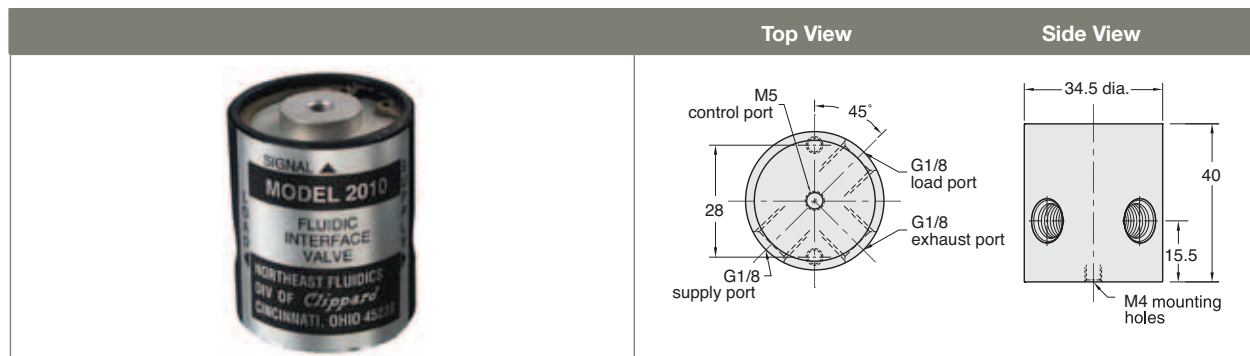

| Part No. | Description |
|----------|---------------------------------|
| M-2010 | Normally-Closed Interface, G1/8 |