



# MODULAR 3-WAY COMBINATION VALVES

## R-321



### 3-Way Combination Valve

#### Features:


- Indicator shows valve in shaded position
- Multiple porting speeds piping
- Micro gap construction - snap action and no blow by
- Balanced design allows speed control at exhausts

#### Performance:

**Flow:** 9 scfm @ 100 psig  
**Pilot Pressure Minimum:** 40 psig  
**Temperature:** 32 to 180°F  
**Working Pressure:** 0 to 150 psig

#### Description:

R-321 is a 3-way, spring return, fully ported valve with an interconnected shuttle valve in one pilot line to provide two inputs to the pilot. It can be used Normally-Open, Normally-Closed, as a diverter, or as a selector. Auxiliary outlet is provided through port 7, which should be plugged if not used.

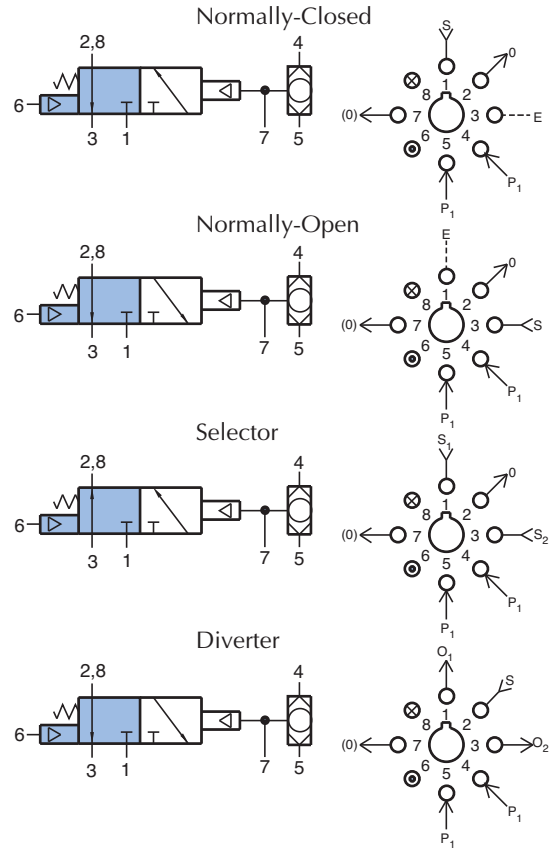

## R-322



### 3-Way Combination Valve

#### Features:

- Indicator shows valve in shaded position
- Multiple porting speeds piping
- Micro gap construction - snap action and no blow by
- Balanced design allows speed control at exhausts

#### Performance:

**Flow:** 9 scfm @ 100 psig  
**Pilot Pressure Minimum:** 20 psig  
**Temperature:** 32 to 180°F  
**Working Pressure:** 0 to 150 psig

#### Description:

R-322 is a 3-way valve, 2-position, fully ported, with an interconnected shuttle valve in one pilot line to provide two inputs to the pilot. It can be Normally-Open, Normally-Closed, as a 2-position selector, or as a 2-position diverter. Auxiliary outlet is provided through port 7, which should be plugged if not used.

