


Air Flow

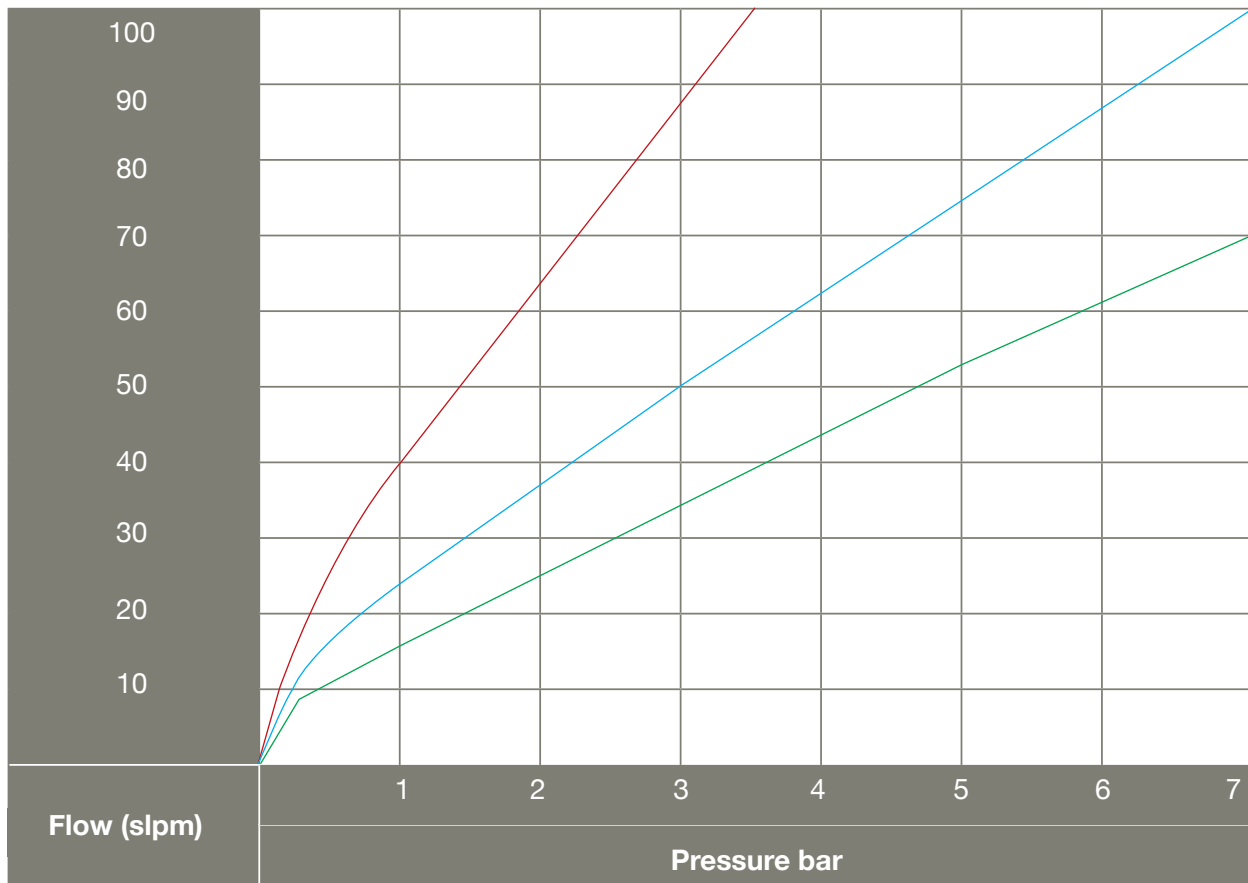

— M-DV/M-DT-2M-12/24-L (1.8 orifice) — M-DV/M-DT-3
— M-DV/M-DT-2M-12/24 (1.3 orifice)

Medium:
Air or Compatible Gases

Power Consumption:
1,9 watts

Ambient Temperature Range:
0 to 55°C at continuous duty

Response:
10 to 15 milliseconds

Pressure Range:
Vac. to 7 bar

Wetted Parts:
Stainless Steel, PPS & Ultem™

Voltage:
12 or 24 VDC

Electrical Connection:
Spade Terminals or Wire Leads

Material
Nitrile standard. FKM („-V“) optional

Ports:
M5

Mounting:
Manifold or Cartridge Style (inserts into 19.0 mm bore)

