

64 Electronic Valves – 15 mm Miniature Valves

Multiple connectors:
Snap-in Plugs | Wire Leads
Custom Plugs | DIN
Terminal Spades

LED for confirmation of operation

International diodes for current spike suppression and a power saving circuit is available

HIGHLY VISIBLE manual override provides valve actuation without power

Mounting Screws: M3 x 0.5

Front left corner of valve!

High durability and corrosion-resistant glass filled nylon housing

FKM seals and Nitrile gasket (FKM available)

2/2 or 3/2 valves in Normally-Closed and Normally-Open


1 2 3

Encapsulated low wattage coils. Available in 12 VDC, 24 VDC, 24 VAC, 110 VAC or 220 VAC. Special voltages available for OEMs.

One-piece gasket for manifold mount and supply/exhaust port reversed for same manifold mounting of N.O. or N.C. valve


Config.	1	2	3
N.C. + N.O.	exhaust	outlet	supply

Functional Schematics

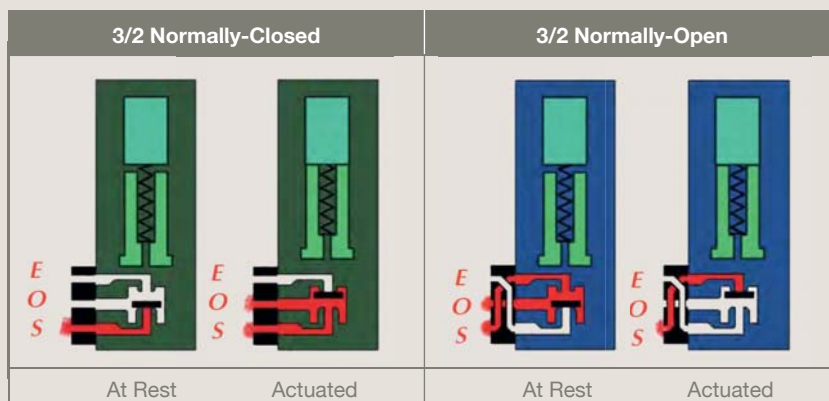

Porting Gasket

The Normally-Open and Normally-Closed configurations allow both models to be mounted on the same manifold.

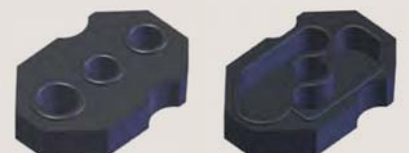

S - Supply | E - Exhaust | O - Outlet