




1/2" BORE STAINLESS STEEL CYLINDER

USR-08-□-□

Single Acting

Mount: Universal **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Rotating Rod **Spring Compressed:** 2 lbs. **Spring At Rest:** 0.9 lbs.
Options: MB, B, H, V, P6, N Bumpers add .500 For magnetic bumpers add .812

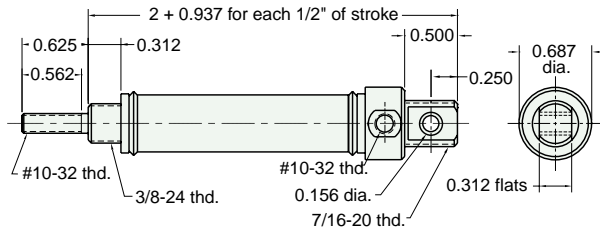


Furnished without nut(s). See Chart on Page 14.

FDR-08-□-□

Double Acting

Mount: Front **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Rotating Rod **Options:** MB, B, V, P6, P7, P8, S, N Bumpers add .500 For magnetic bumpers add .812

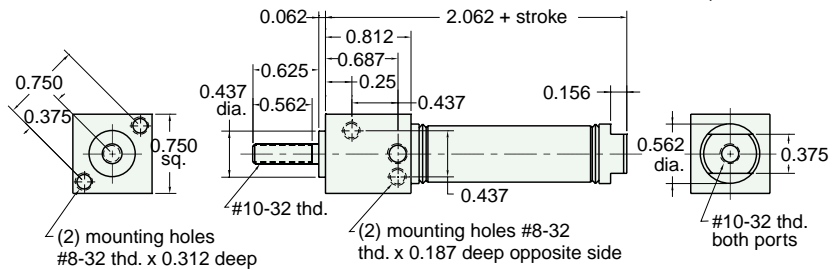


For S option add .187

SDR-08-□-□

Double Acting

Mount: Stud **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Rotating Rod **Options:** MB, B, V, P6, P7, P8, S, N For bumpers add .500
For magnetic bumpers add .812

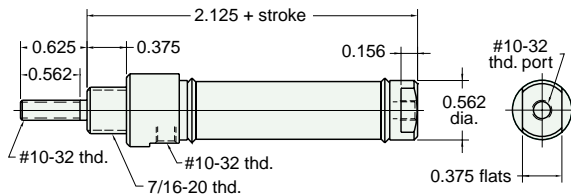


For S option add .187

Nut included, but not shown on drawing

UDR-08-□-□

Double Acting

Mount: Universal **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Rotating Rod **Options:** MB, B, V, P2, P3, P4, P5, P6, P7, P8, N For bumpers add .500
For magnetic bumpers add .812

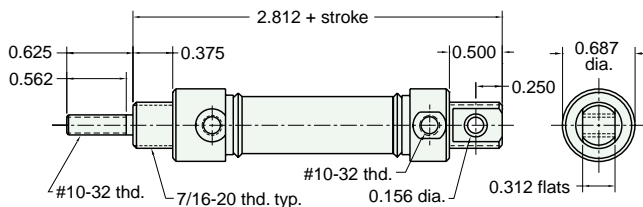

Furnished without nut(s). See Chart on Page 14.