

7/8" BORE STAINLESS STEEL CYLINDER




SSN-14-□-□

Single Acting



Mount: Stud **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Non-Rotating Rod **Spring Compressed:** 6 lbs. **Spring At Rest:** 3 lbs.
Options: MB, H, V, S, N **Bumpers are standard.** For magnetic bumpers add .312

For S option add .281

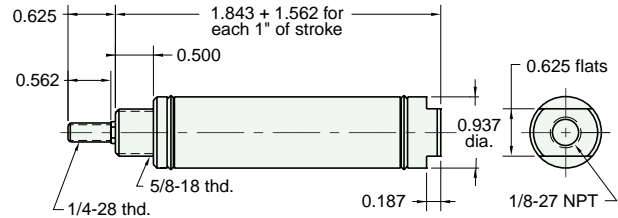

Nut included, but not shown on drawing


SSR-14-□-□

Single Acting



Mount: Stud **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Rotating Rod **Spring Compressed:** 6 lbs. **Spring At Rest:** 3 lbs.
Options: MB, H, V, S, N **Bumpers are standard.** For magnetic bumpers add .312

For S option add .281

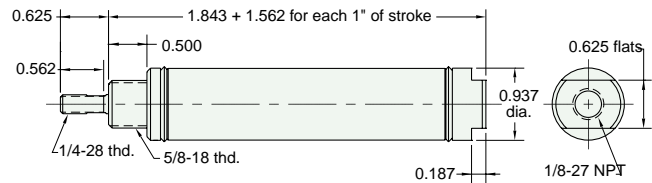


Nut included, but not shown on drawing

USN-14-□-□

Single Acting



Mount: Universal **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Non-Rotating Rod **Spring Compressed:** 6 lbs. **Spring At Rest:** 3 lbs.
Options: MB, H, V, P2, P3, P4, P5, P6, P7, P8, N **Bumpers are standard.** For magnetic bumpers add .312

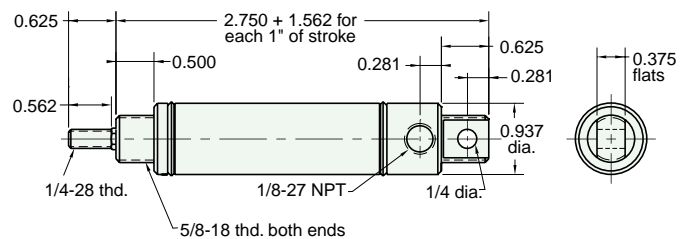

Furnished without nut(s). See Chart on Page 28.


USR-14-□-□

Single Acting



Mount: Universal **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Rotating Rod **Spring Compressed:** 6 lbs. **Spring At Rest:** 3 lbs.
Options: MB, H, V, P2, P3, P4, P5, P6, P7, P8, N **Bumpers are standard.** For magnetic bumpers add .312

Furnished without nut(s)
See chart on page 28

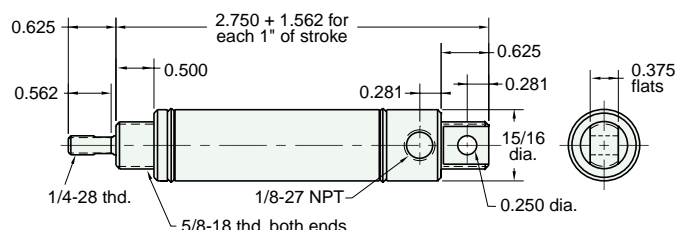

Furnished without nut(s). See Chart on Page 28.