



7/8" BORE STAINLESS STEEL CYLINDER


SDR-14-□-□

Double Acting



Mount: Stud **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4", 5", 6"
Type: Rotating Rod
Options: C, F, R, MB, W, V, P6, P7, P8, S, N

Bumpers are standard
For magnetic bumpers add .312
For C, F, R and S option add .281

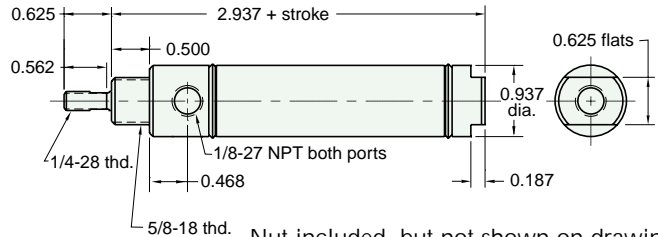

Nut included, but not shown on drawing
For C, F, & R options use side ported rear head


UDR-14-□-□

Double Acting



Mount: Universal **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4", 5", 6"
Type: Rotating Rod
Options: C, F, R, MB, W, V, P2, P3, P4, P5, P6, P7, P8, N

Furnished without nut(s)
See chart on page 29
Bumpers are standard
For magnetic bumpers add .312

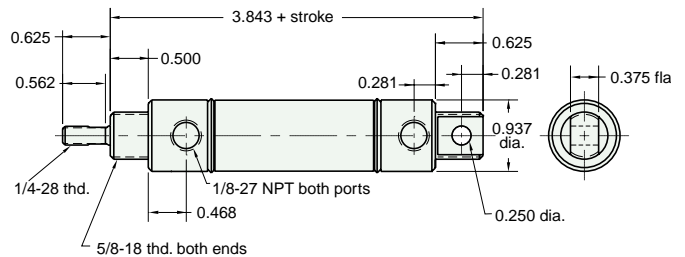

Furnished without nut(s). See Chart on Page 18.


SDD-14-□-□

Double Acting



Mount: Stud **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4", 5", 6"
Type: Double Rod
Options: C, F, MB, W, V, P6, P7, P8, N

Bumpers are standard
For magnetic bumpers add .312

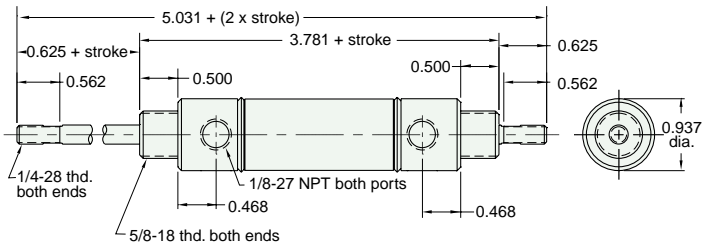

Nuts included, but not shown on drawing


SDH-14-□-□

Double Acting



Mount: Stud **Standard Stroke Lengths:** 1", 2", 3", 4", 5", 6"
Type: Hollow Rod
Options: C, F, MB, W, V, P6, P7, P8, N

Bumpers are standard
For magnetic bumpers add .312

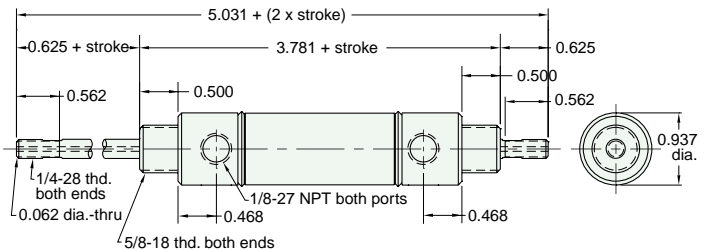

Nuts included, but not shown on drawing