




1 1/16" BORE STAINLESS STEEL CYLINDER

USN-17-□-□

Single Acting

Mount: Universal **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Non-Rotating Rod **Spring Compressed:** 7 lbs. **Spring At Rest:** 2 lbs.
Options: MB, B, H, V, P6, N For magnetic bumpers add .312

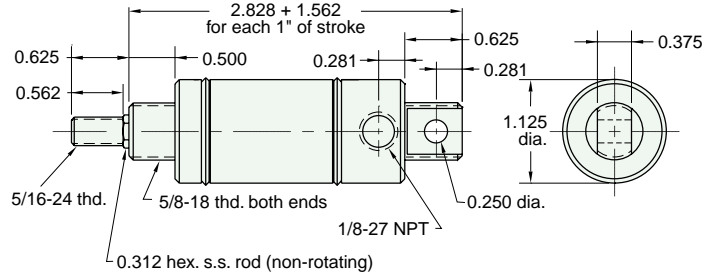


Furnished without nut(s). See Chart on Page 34.

USR-17-□-□

Single Acting

Mount: Universal **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Rotating Rod **Spring Compressed:** 7 lbs. **Spring At Rest:** 2 lbs.
Options: MB, B, H, V, P6, N For magnetic bumpers add .312

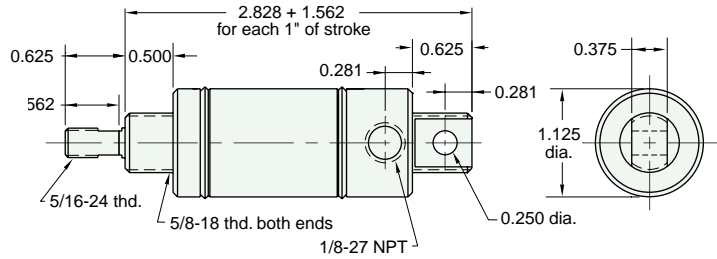


Furnished without nut(s). See Chart on Page 34.

FDR-17-□-□

Double Acting

Mount: Front **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4", 5", 6"
Type: Rotating Rod **Options:** MB, B, W, V, P6, P7, P8, S, N For magnetic bumpers add .312

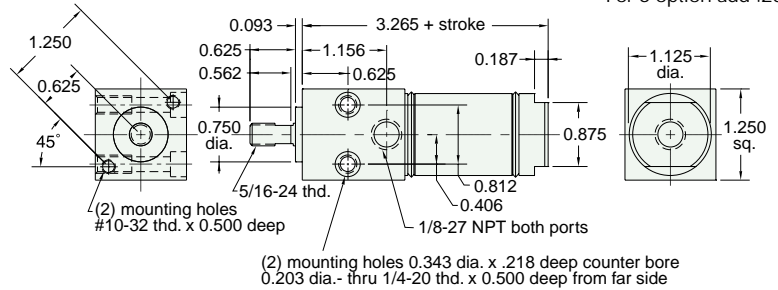


For S option add .250

SDR-17-□-□

Double Acting

Mount: Stud **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4", 5", 6"
Type: Rotating Rod **Options:** C, F, R, MB, B, W, V, P6, P7, P8, S, N For magnetic bumpers add .312

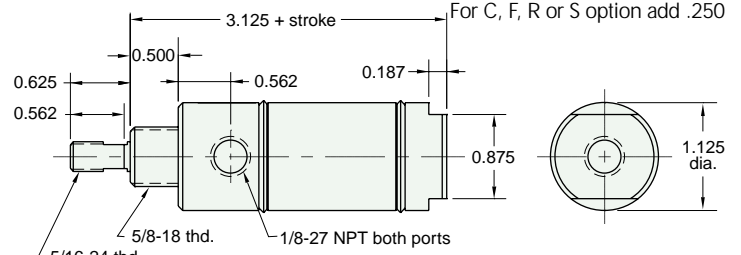

Nut included, but not shown on drawing
For C, F, & R options use side ported rear head