

# 1 1/4" BORE STAINLESS STEEL CYLINDER




**Note:** The 1 1/4" bore is also available with a 7/16-20 threaded rod. Order -LR option.

## SSN-20-□-□

Single Acting

**Mount:** Stud      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Non-Rotating Rod      **Spring Compressed:** 10 lbs.      **Spring At Rest:** 4.5 lbs.  
**Options:** MB, B, H, V, S, N

For S option add .312

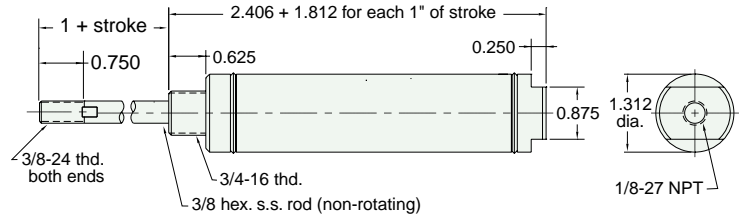


Nut included, but not shown on drawing

## SSR-20-□-□

Single Acting

**Mount:** Stud      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 10 lbs.      **Spring At Rest:** 4.5 lbs.  
**Options:** MB, B, H, V, S, N

For S option add .312

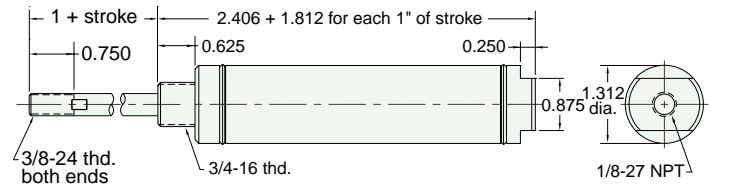


Nut included, but not shown on drawing

## USN-20-□-□

Single Acting

**Mount:** Universal      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Non-Rotating Rod      **Spring Compressed:** 10 lbs.      **Spring At Rest:** 4.5 lbs.  
**Options:** MB, B, H, V, P2, P3, P4, P5, P6, P7, P8, N

For magnetic bumpers add .312

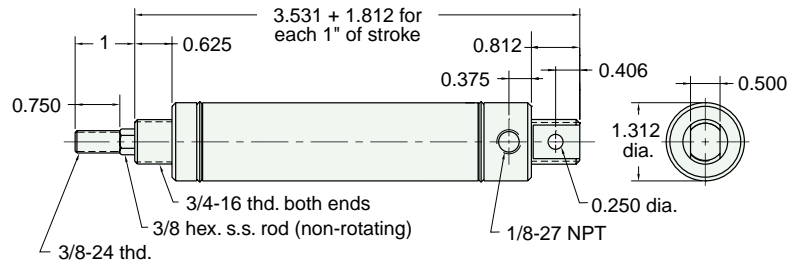


Furnished without nut(s). See Chart on Page 38.

## USR-20-□-□

Single Acting

**Mount:** Universal      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 10 lbs.      **Spring At Rest:** 4.5 lbs.  
**Options:** MB, B, H, V, P2, P3, P4, P5, P6, P7, P8, N

For magnetic bumpers add .312

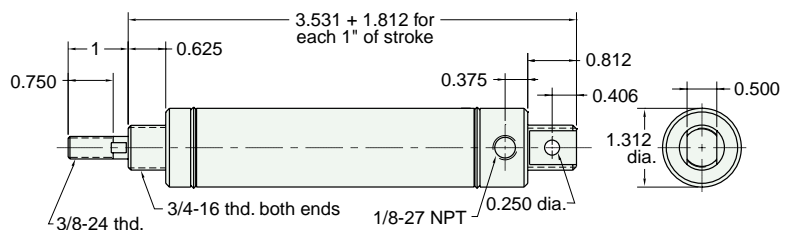

Furnished without nut(s). See Chart on Page 38.