



# 1 1/4" BORE STAINLESS STEEL CYLINDER


**Note:** The 1 1/4" bore is also available with a 7/16-20 threaded rod. Order -LR option.

## SDR-20-□-□

Double Acting



**Mount:** Stud      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4", 5", 6"  
**Type:** Rotating Rod  
**Options:** C, F, R, MB, B, W, V, P6, P7, P8, S, N      For magnetic bumpers add .312  
For C, F, R and S option add .312

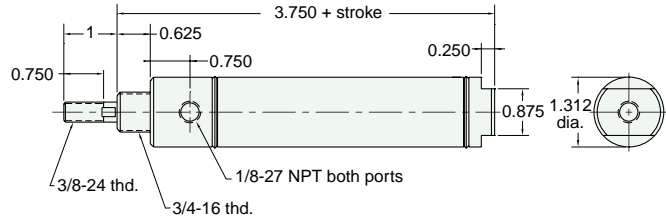


Nut included, but not shown on drawing  
For C, F, & R options use side ported rear head

## UDR-20-□-□

Double Acting



**Mount:** Universal      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4", 6, 8", 10", 12"  
**Type:** Rotating Rod  
**Options:** C, F, R, MB, B, W, V, P2, P3, P4, P5, P6, P7, P8, N      For magnetic bumpers add .312

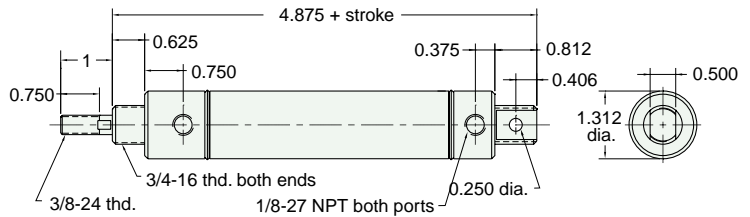


Furnished without nut(s). See Chart on Page 38.

## SDD-20-□-□

Double Acting




**Mount:** Stud      **Standard Stroke Lengths:** 1", 2", 3", 4", 5", 6"  
**Type:** Double Rod  
**Options:** C, F, MB, B, W, V, P6, P7, P8, N      For magnetic bumpers add .312

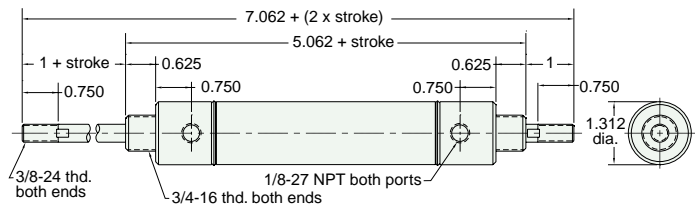


Nuts included, but not shown on drawing

## SRR-20-□-□

Reverse Acting



**Mount:** Stud      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 10 lbs.      **Spring At Rest:** 4.5 lbs.  
**Options:** MB, B, H, W, V, N      For magnetic bumpers add .312

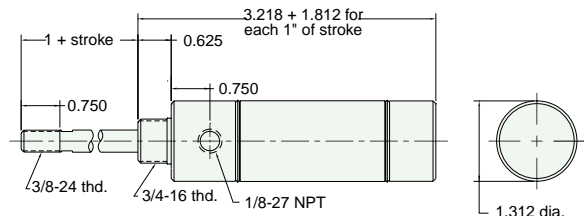

Nuts included, but not shown on drawing