


1 3/4" BORE STAINLESS STEEL CYLINDER



SSN-28-□-□

Single Acting

Mount: Stud **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Non-Rotating Rod **Spring Compressed:** 24 lbs. **Spring At Rest:** 11 lbs.
Options: MB, V, S, N **Bumpers are standard** For magnetic bumpers add .312
 For S option add .562

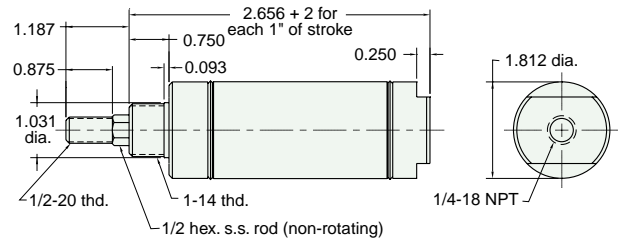


Nut included, but not shown on drawing

SSR-28-□-□

Single Acting

Mount: Stud **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Rotating Rod **Spring Compressed:** 24 lbs. **Spring At Rest:** 11 lbs.
Options: MB, V, S, N **Bumpers are standard** For magnetic bumpers add .312
 For S option add .562

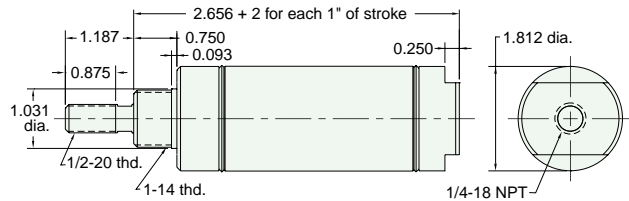


Nut included, but not shown on drawing

USN-28-□-□

Single Acting

Mount: Universal **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Non-Rotating Rod **Spring Compressed:** 24 lbs. **Spring At Rest:** 11 lbs.
Options: MB, V, P2, P3, P4, P5, P6, P7, P8, N **Bumpers are standard** For magnetic bumpers add .312

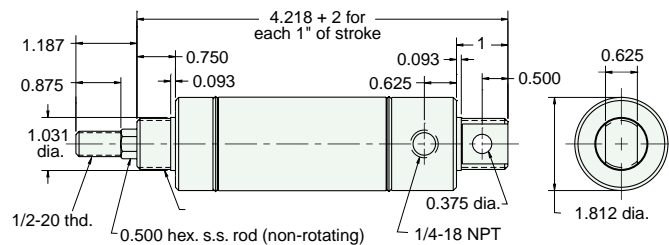


Furnished without nut(s). See Chart on Page 50.

USR-28-□-□

Single Acting

Mount: Universal **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Rotating Rod **Spring Compressed:** 24 lbs. **Spring At Rest:** 11 lbs.
Options: MB, V, P2, P3, P4, P5, P6, P7, P8, N **Bumpers are standard** For magnetic bumpers add .312

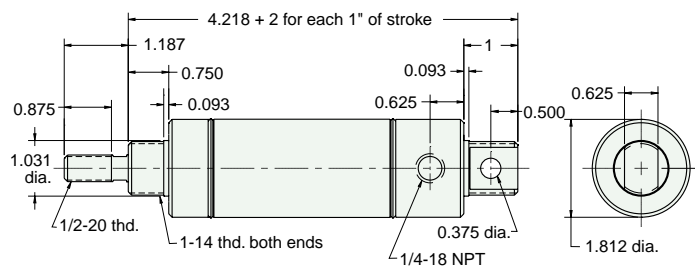

Furnished without nut(s). See Chart on Page 50.