



1 3/4" BORE STAINLESS STEEL CYLINDER


SDR-28-□-□

Double Acting



Mount: Stud **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4", 5", 6"
Type: Rotating Rod
Options: C, F, R, MB, W, V, P6, P7, P8, S, N

Bumpers are standard
 For magnetic bumpers add .312

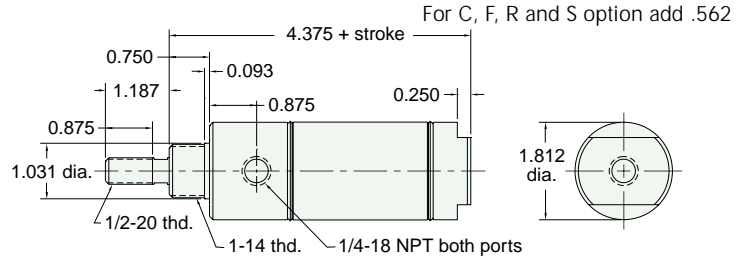

Nut included, but not shown on drawing
 For C, F, & R options use side ported rear head


UDR-28-□-□

Double Acting



Mount: Universal **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4", 6, 8", 10", 12"
Type: Rotating Rod
Options: C, F, R, MB, W, V, P2, P3, P4, P5, P6, P7, P8, N

Bumpers are standard
 For magnetic bumpers add .312

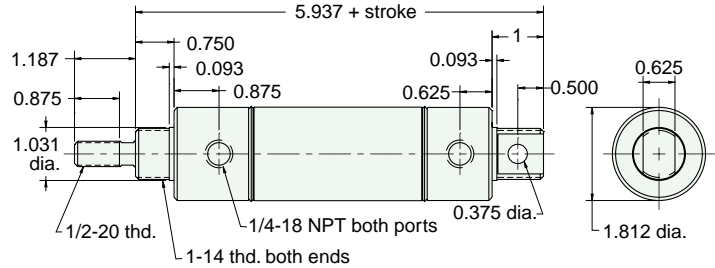

Furnished without nut(s). See Chart on Page 50.


SDD-28-□-□

Double Acting



Mount: Stud **Standard Stroke Lengths:** 1", 2", 3", 4", 5", 6", 8", 10", 12"
Type: Double Rod
Options: C, F, MB, W, V, P6, P7, P8, N

Bumpers are standard
 For magnetic bumpers add .312

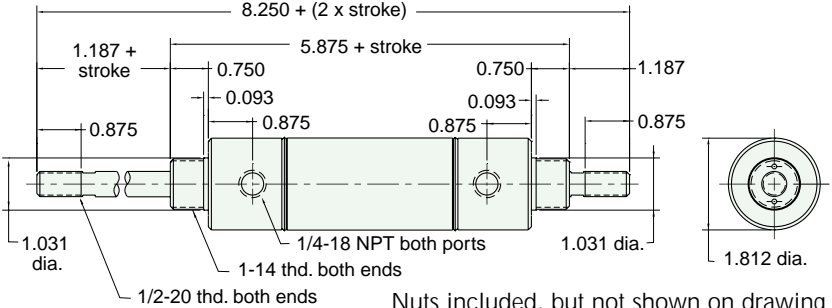

Nuts included, but not shown on drawing


SRR-28-□-□

Reverse Acting



Mount: Stud **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Rotating Rod **Spring Compressed:** 24 lbs. **Spring At Rest:** 11 lbs.
Options: MB, W, V, N

Bumpers are standard
 For magnetic bumpers add .312

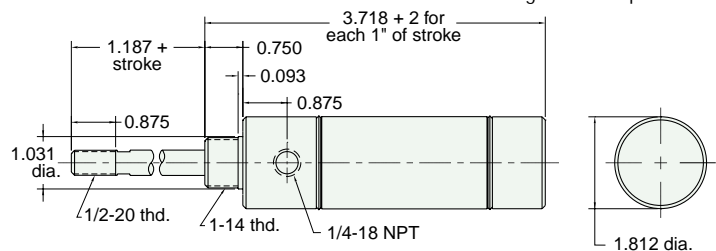

Nut included, but not shown on drawing