




# 2" BORE STAINLESS STEEL CYLINDER

## SDD-32-□-□

Double Acting

**Mount:** Stud      **Standard Stroke Lengths:** 1", 2", 3", 4", 5", 6", 8", 10", 12"  
**Type:** Double Rod  
**Options:** C, F, MB, B, W, V, P2, P3, P4, P5, P6, P7, P8, N      For magnetic bumpers add .312

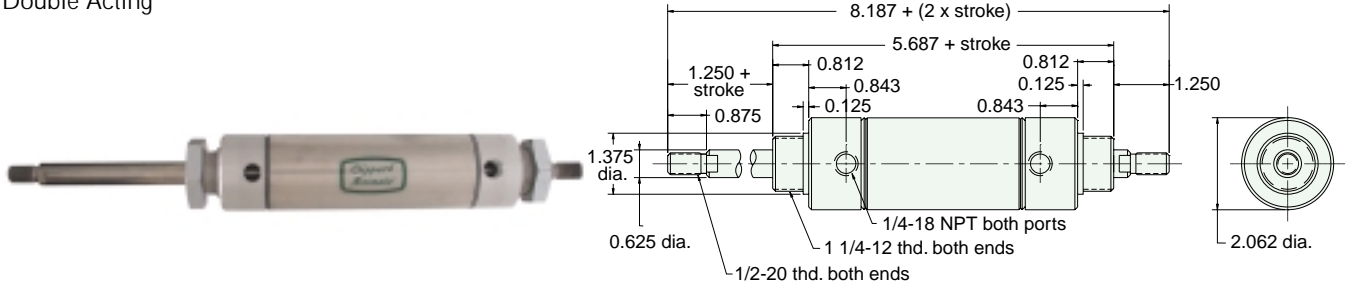


Nuts included, but not shown on drawing

## SRR-32-□-□

Reverse Acting

**Mount:** Stud      **Standard Stroke Lengths:** 1", 2", 3", 4", 5", 6"  
**Type:** Rotating Rod      **Spring Compressed:** 30 lbs. **Spring At Rest:** 15 lbs.  
**Options:** MB, B, W, V, N      For magnetic bumpers add .312

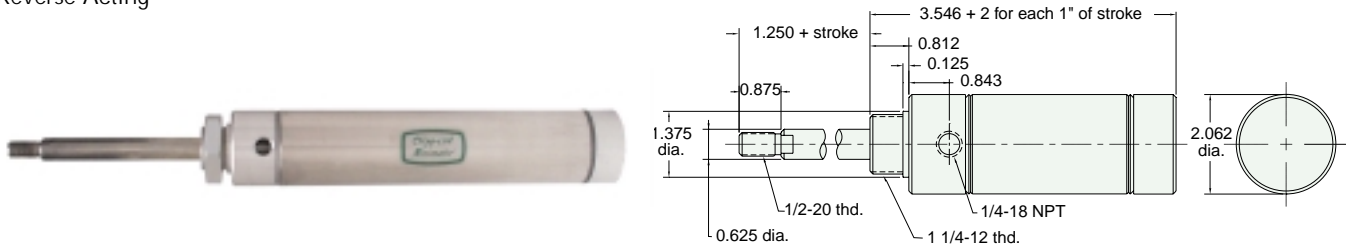


Nut included, but not shown on drawing

## URR-32-□-□

Reverse Acting

**Mount:** Universal      **Standard Stroke Lengths:**  $1/2"$ , 1", 1- $1/2"$ , 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 30 lbs. **Spring At Rest:** 15 lbs.  
**Options:** MB, B, W, V, P6, N      For magnetic bumpers add .312

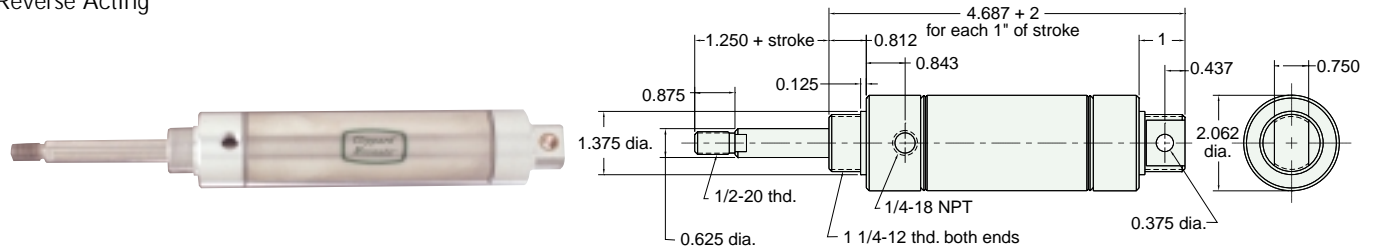


Furnished without nut(s). See Chart on Page 54.

## SFR-32-□-□

Spring Bias

**Mount:** Stud      **Standard Stroke Lengths:**  $1/2"$ , 1", 1- $1/2"$ , 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 30 lbs. **Spring At Rest:** 15 lbs.  
**Options:** MB, B, W, V, P6, P7, P8, S, N      For magnetic bumpers add .312

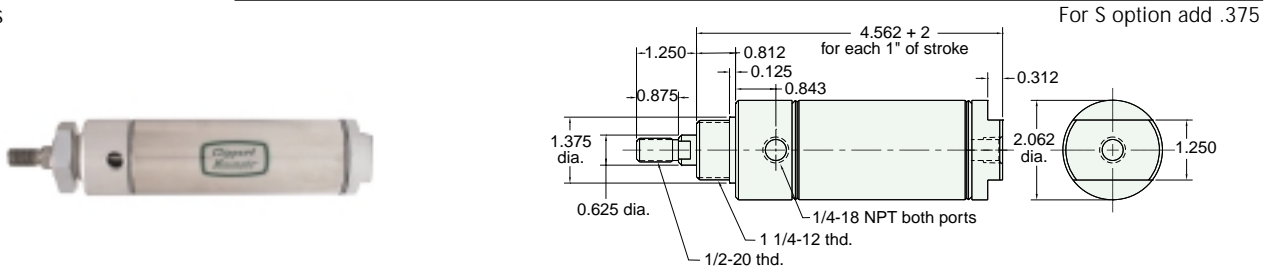

Nut included, but not shown on drawing