SDR-48-❑-❑

Double Acting

Mount: Stud
Type: Rotating Rod
Options: MB, W, V, P6, P7, P8, S, N

Standard Stroke Lengths: 1”, 2”, 3”, 4”, 5”, 6”

Bumpers are standard
No additional length for bumpers

For S option add .437

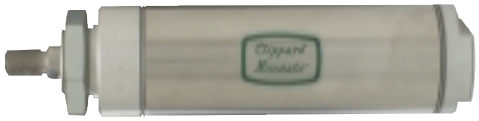

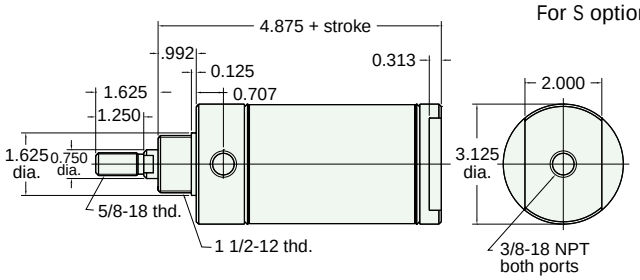

Nut included, but not shown on drawing

UDR-48-❑-❑

Double Acting

Mount: Universal
Type: Rotating Rod 12”
Options: MB, W, V, P2, P3, P4, P5, P6, P7, P8, N

Standard Stroke Lengths: 1”, 2”, 3”, 4”, 5”, 6”, 7, 8”, 10”,

Bumpers are standard
No additional length for bumpers

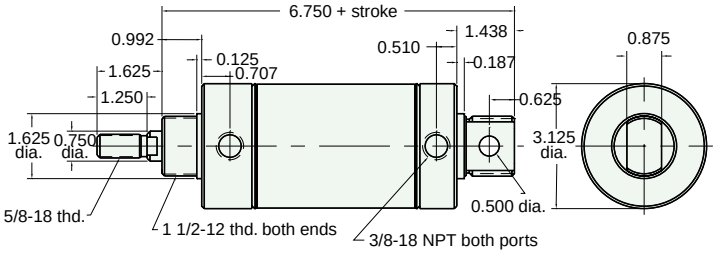

Furnished without nut(s). See Chart on Page 58.

SDD-48-❑-❑

Double Acting

Mount: Stud
Type: Double Rod
Options: MB, W, V, P6, P7, P8, N

Standard Stroke Lengths: 1”, 2”, 3”, 4”, 5”, 6”, 8”, 10”, 12”

Bumpers are standard
No additional length for bumpers

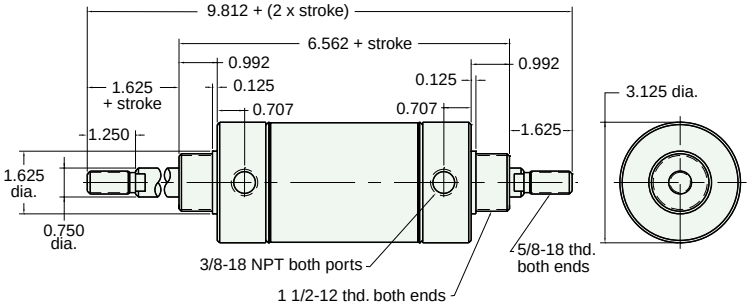

Nuts included, but not shown on drawing

Did you know...

Minimatic®
Minimetric
Fluidamp®
Octoport®
Air-2-Electric® and Air Force One® are all Clippard’s registered trademarks.