

# 1 1/2" BORE CORROSION RESISTANT CYLINDER




## CR-SDD-24-□-□

Double Acting

Mount: Stud  
Type: Double Rod

Standard Stroke Lengths: 1", 2", 3", 4", 5", 6", 8", 10", 12"  
Options: M, V, N, P6, P7, P8

For magnetic option add .312

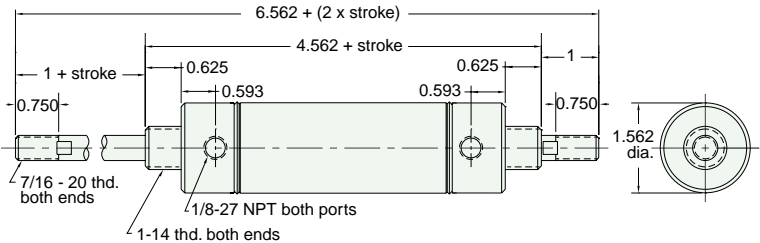

Furnished without nut(s). Order Part No. N16-14-SS.


## CR-SDR-24-□-□

Double Acting

Mount: Stud  
Type: Rotating Rod

Standard Stroke Lengths: 1/2", 1", 1-1/2", 2", 3", 4", 5", 6"  
Options: M, V, N

For magnetic option add .312

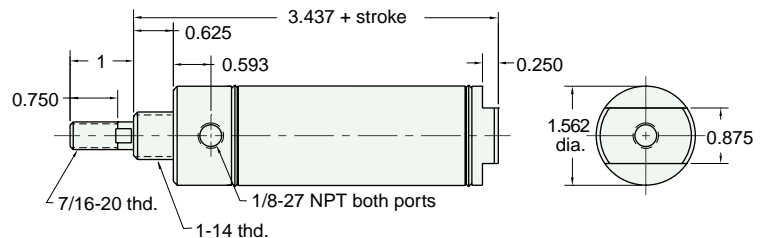

Furnished without nut(s). Order Part No. N16-14-SS.


## CR-UDR-24-□-□

Double Acting

Mount: Universal  
Type: Rotating Rod

Standard Stroke Lengths: 1/2", 1", 1-1/2", 2", 3", 4", 5", 6", 8", 10", 12"  
Options: M, V, N, P2, P3, P4, P5, P6, P7, P8

For magnetic option add .312

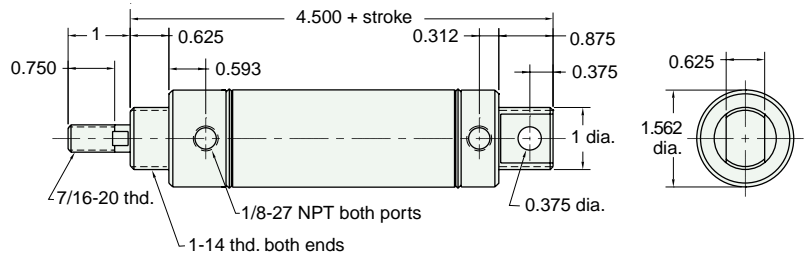

Furnished without nut(s). Order Part No. N16-14-SS.

## Stainless Steel Mounting

Foot Bracket  
Model Number: FB-2891-SS

Nut  
Model Number: N16-14-SS  
Max. Torque in lbs.: 30

