


3-WAY TOGGLE & STEM VALVES



2 Position Spool Valves

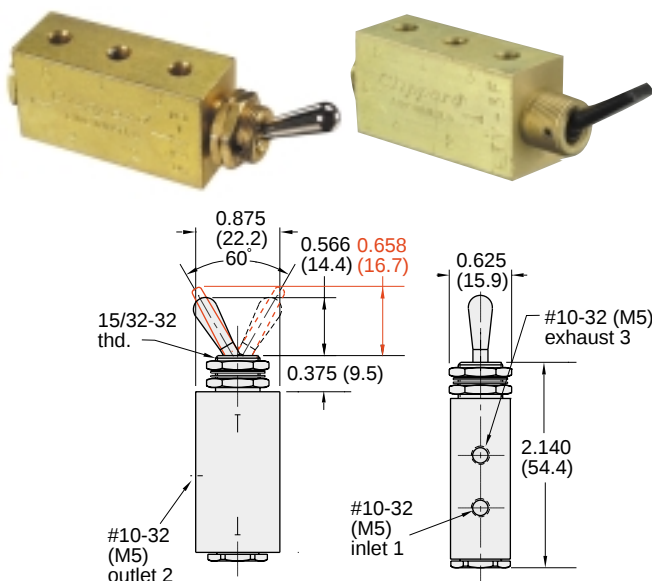


Input Pressure: 150 psig/10 bar max.

Air Flow: 6 SCFM @ 50 psig; 10 SCFM @ 100 psig;
280 l/min @ 6 bar


Force For Full Stem Travel: 16 oz. nominal

Mounting: 15/32-32 thread. Nuts and lockwashers furnished.



Part No.	Description
FTV-3	.2 Position Spool Valve, NP Brass Toggle, #10-32
FTV-3-M5	.2 Position Spool Valve, NP Brass Toggle, M5
FTV-3F	.2 Position Spool Valve, Plastic Toggle, #10-32
FTV-3F-M5	.2 Position Spool Valve, Plastic Toggle, M5

2 Position Spool Valves

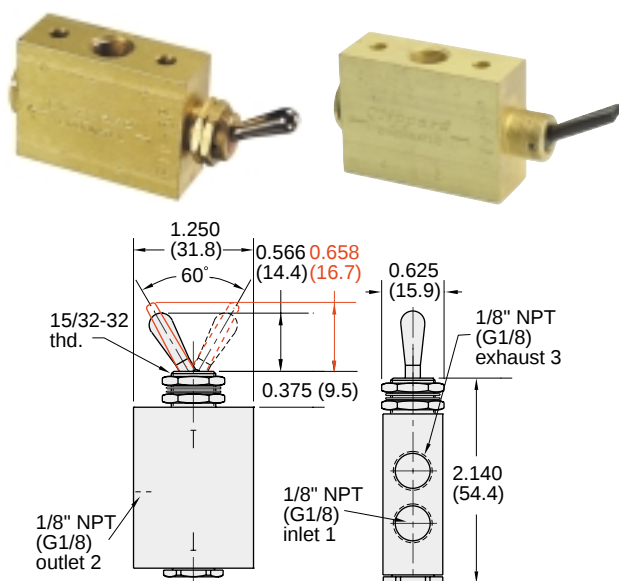


Input Pressure: 150 psig/10 bar max.

Air Flow: 6.5 SCFM @ 50 psig; 10.5 SCFM @ 100 psig;
290 l/min @ 6 bar


Force For Full Stem Travel: 16 oz. nominal

Mounting: 15/32-32 thread. Nuts and lockwashers furnished.



Part No.	Description
FTV-3P	.2 Position Spool Valve, NP Brass Toggle, 1/8" NPT
FTV-3P-MG	.2 Position Spool Valve, NP Brass Toggle, G1/8
FTV-3FP	.2 Position Spool Valve, Plastic Toggle, 1/8" NPT
FTV-3FP-MG	.2 Position Spool Valve, Plastic Toggle, G1/8

Sub-Miniature Spool Valve

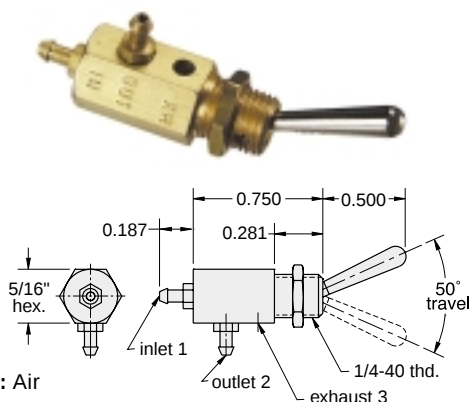


Medium: Air

Input Pressure: 100 psig max.

Air Flow: 1.4 SCFM @ 100 psig


Force For Full Stem Travel: 24 oz. nominal

Spool Material: Delrin®



Part No.	Description
SMTV-3	.Sub-Miniature Spool Valve

Sub-Miniature N.O. or N.C. Spool Valve

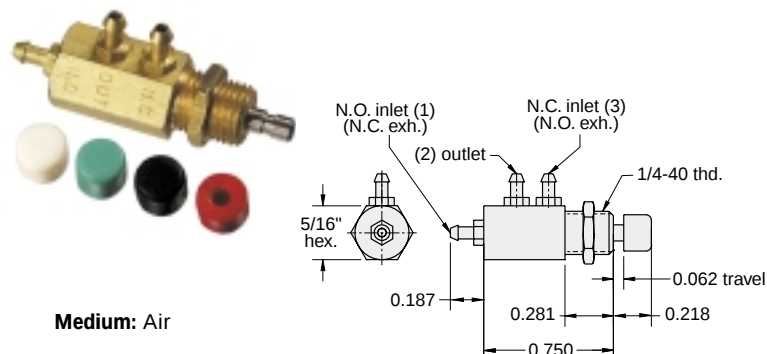

Medium: Air


Stem Travel: 1/16"

Input Pressure: 100 psig max.

Air Flow: 1.4 SCFM @ 100 psig

Force For Full Stem Travel: 20 oz. nominal

Spool Material: Delrin®



Part No.	Description
SMAV-3	.Sub-Miniature N.O. or N.C.