







4-WAY TOGGLE VALVES

3 Position Toggle Valves

By choosing valves with different toggle position options the user can customize the application to best suit the needs. For example, the DM model can be used on the momentary side as a "jog" or "manual" control, and with the detented side for "automatic" or "run" mode.

Valves are made of solid brass, bright dipped finish to resist corrosion; stems and springs are of stainless steel, toggle of black acetyl plastic, and seals of Buna-N rubber.



Model Number				
TV-4D TV-4D-M5 TV-4DP	#10-32 M5 1/8" NPT	Detented	SPRING CENTERED supply blocked both sides exhausted	Detented
TV-4M TV-4M-M5 TV-4MP	#10-32 M5 1/8" NPT	Momentary		Momentary
TV-4DM TV-4DM-M5 TV-4DMP	#10-32 M5 1/8" NPT	Detented		Momentary

Medium: Air

Materials: Brass body, Buna-N seals, stainless steel stem and spring

Input Pressure: 150 psig/10 bar max.



Air Flow: 4.5 SCFM @ 50 psig; 7.5 SCFM @ 100 psig;
180 l/min @ 6 bar

Force For Full Stem Travel: 8 oz. nominal

Toggle: Plastic

Mounting: 5/8-32 thread. Nut and lockwashers furnished.


3 Position Toggle Valves, #10-32/M5

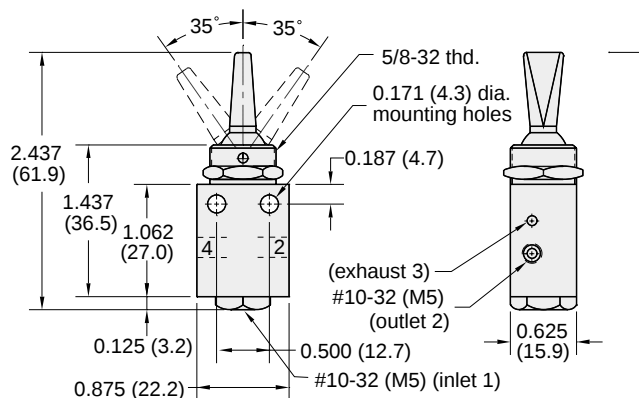

Part No. Description

TV-4DToggle Valve, Detented/Detented, #10-32
TV-4D-M5 . .Toggle Valve, Detented/Detented, M5
TV-4MToggle Valve, Momentary/Momentary, #10-32
TV-4M-M5 . .Toggle Valve, M5, Momentary/Momentary, M5
TV-4DM . . .Toggle Valve, Detented/Momentary, #10-32
TV-4DM-M5 .Toggle Valve, Detented/Momentary, M5

3 Position Toggle Valves, 1/8" NPT

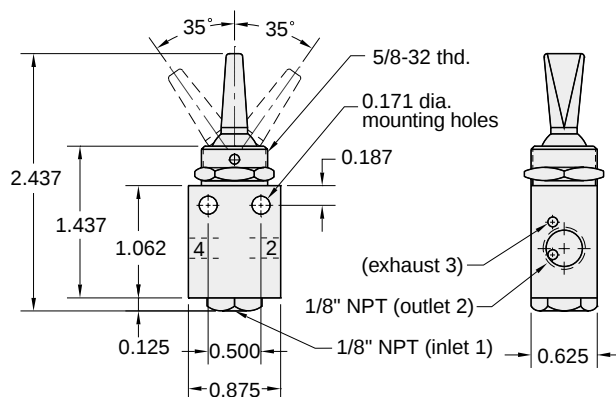

Part No. Description

TV-4DPToggle Valve, Detented/Detented, 1/8" NPT
TV-4MPToggle Valve, Momentary/Momentary, 1/8" NPT
TV-4DMP . . .Toggle Valve, Detented/Momentary, 1/8" NPT