

R-323



3-Way Combination Valve

Features:


- Indicator shows valve in shaded position
- Multiple valves save space
- Micro gap construction - snap action and no blow by
- Balanced design allows speed control at exhausts

Performance:

Flow (SCFM @ 100 psig).....	9
Pilot pressure (psig) minimum.....	40
Temperature.....	32° to 180° F
Working pressure.....	0 to 150

Description:

R-323 is a 3-way, spring return, fully ported valve with an independent shuttle valve in the same body. Both valves may be used independently in a circuit. The 3-way can be used normally-OPEN, normally-CLOSED; as a diverter, or as a selector. The R-323 also features an auxiliary pilot on the spring side of the valve.

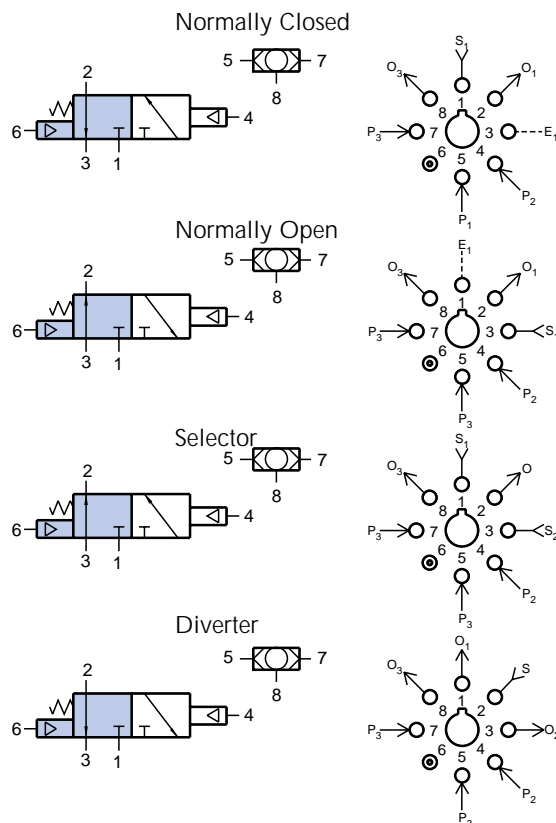

R-324



3-Way Combination Valve

Features:

- Indicator shows valve in shaded position
- Multiple valves save space
- Micro gap construction - snap action and no blow by
- Balanced design allows speed control at exhausts

Performance:

Flow (SCFM @ 100 psig).....	9
Pilot pressure (psig) minimum.....	20
Temperature.....	32° to 180° F
Working pressure.....	0 to 150

Description:

R-324 is a 3-way, two position, fully ported valve with an independent shuttle valve in the same body. Both valves may be used independently in a circuit. The 3-way can be used normally-OPEN, normally-CLOSED; as a diverter, or as a selector.

