



# MINIMATIC® J-SERIES QUICK CONNECT

## VALVE BODY & CAP ASSEMBLIES

\*1/8 Barb - fits 1/8" I.D. hose. Ideal for use with Clippard 3814-6 polyurethane hose.

### FEATURES


- High flow of 14 scfm @ 100 psig
- Space saving attractive miniature design
- Wide variety of connectors
- Adds convenience to equipment and circuits
- Brass body, electroless nickel plated
- Non-corrosive - Delrin® poppet
- Fills the gap between clumsy, large quick connects and smaller quick connects with less flow
- Buna-N seals, positive shut off
- Positive threaded connection, stays connected
- Medium: air, oil, and water
- Working Pressure: 0-150 psig max.



Minimatic® J-Series quick connect fittings are very compact yet provide a high flow of 14 scfm @ 100 psig. The electroless nickel plated brass body is available with #10-32 threads (M or F), 1/8" NPT threads (M or F), 1/4" NPT threads (M) or a 1/8" hose single barb configuration that is ideal for use with Clippard 3814-6 polyurethane hose.


### MJQC-B4B4

Combination of MJQC-VB4 & MJQC-CB4

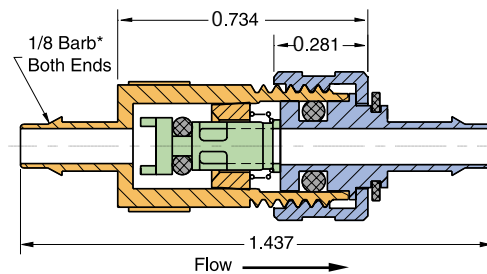

### MJQC-PFB4


Combination of MJQC-VB4 & MJQC-CPF

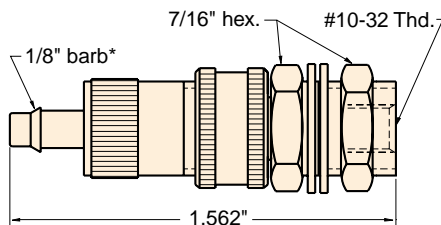

(Supplied with mounting nut and two washers)


### MJQC-MPB4

Combination of MJQC-VB4 & MJQC-CMP

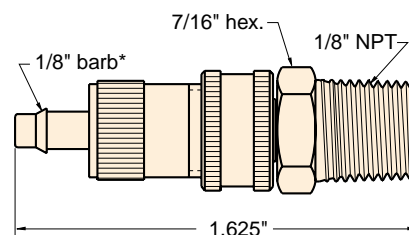


### MJQC-B4MP

Combination of MJQC-VMP & MJQC-CB4

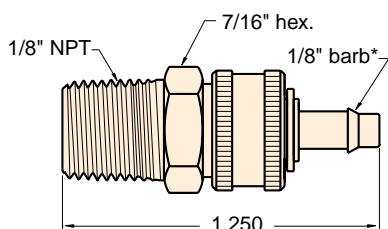

### MJQC-PBB4

Combination of MJQC-VB4 & MJQC-CPB

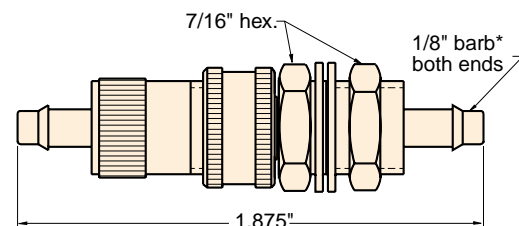

(Supplied with mounting nut and two washers)