



MINIMATIC® J-SERIES QUICK CONNECT

VALVE BODIES


Valve bodies with shut-off valve

Minimatic J-Series quick connect fittings are very compact yet provide a high flow of 14 scfm @ 100 psig. The electroless nickel plated brass body is available with #10-32 threads (M or F), 1/8" NPT threads (M or F), 1/4" NPT threads (M) or a 1/8 hose single barb configuration that is ideal for use with Clippard 3814-6 polyurethane hose.




*1/8 Barb - fits 1/8" I.D. hose. Ideal for use with Clippard 3814-6 polyurethane hose.

MJQC-VB4

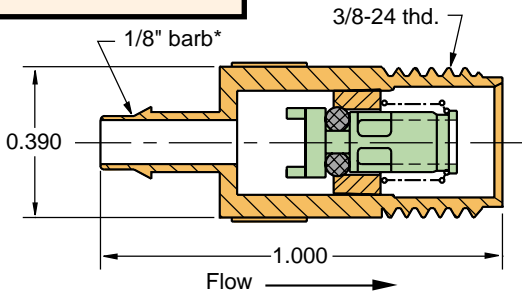


MJQC-VFP

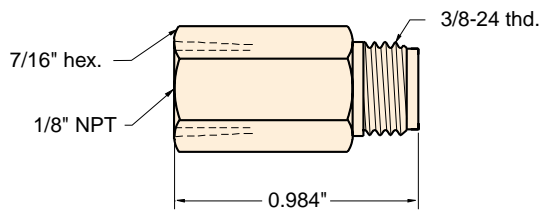


MJQC-VMT


Supplied with mounting nut and two washers

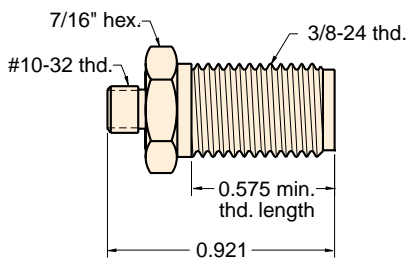

MJQC-VMQ

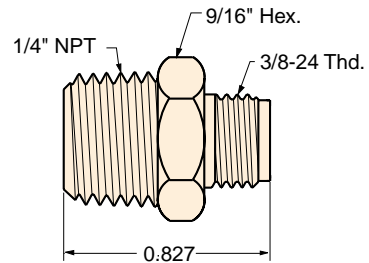

MJQC-VFT

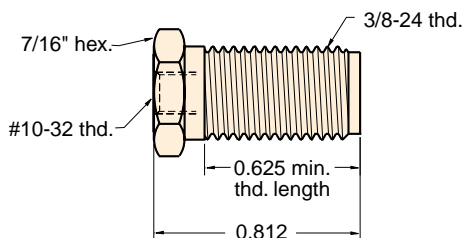

MJQC-VMP

