




CLIPPARD HOSE & TUBING

URT1-0503-□-□



5/32" O.D. 95D Urethane Tubing
Flexible, durable ether based tubing

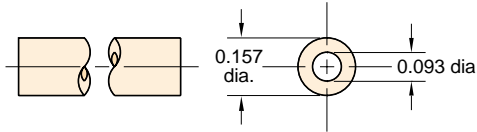

Working Range: 0 to 105 psig at 100°F Maximum 120°F
Static Burst Pressure: Over 500 psig at 70°F
Color: Solid: Black, gray, orange, red, white
Translucent: Blue, clear, green, red, yellow
Lengths Available: 50 and 500 feet
Note: Designed for use with push-in fittings.


Note:

Specify color on order, and use full product number (including code letters for color) as shown in Price List. If no color is specified, clear will be furnished.

URT1-0604M-□-□



6 mm O.D. 95D Urethane Tubing
Flexible, durable ether based tubing

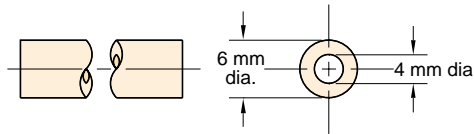

Working Range: 0 to 105 psig at 100°F Maximum 120°F
Static Burst Pressure: Over 450 psig at 70°F
Color: Solid: Black
Translucent: Blue, clear, green, red
Lengths Available: 50 and 500 feet
Note: Designed for use with push-in fittings.


Note:

Specify color on order, and use full product number (including code letters for color) as shown in Price List. If no color is specified, clear will be furnished.

URT1-0805-□-□



1/4" O.D. 95D Urethane Tubing
Flexible, durable ether based tubing

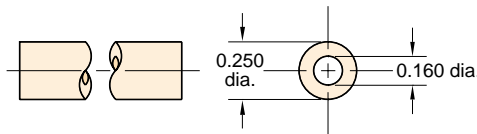

Working Range: 0 to 105 psig at 100°F Maximum 120°F
Static Burst Pressure: Over 450 psig at 70°F
Color: Solid: Black, gray, orange, red, white
Translucent: Blue, clear, green, red, yellow
Lengths Available: 50 and 500 feet
Note: Designed for use with push-in fittings.


Note:

Specify color on order, and use full product number (including code letters for color) as shown in Price List. If no color is specified, clear will be furnished.

URT1-1208-□-□



3/8" O.D. 95D Urethane Tubing
Flexible, durable ether based tubing

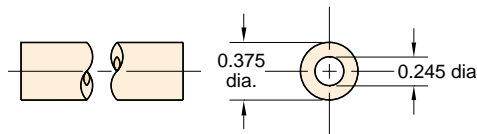

Working Range: 0 to 105 psig at 100°F Maximum 120°F
Static Burst Pressure: Over 440 psig at 75°F
Color: Solid: Black
Translucent: Blue, clear, green, red
Lengths Available: 50 and 500 feet
Note: Designed for use with push-in fittings.


Note:

Specify color on order, and use full product number (including code letters for color) as shown in Price List. If no color is specified, clear will be furnished.

PET1-0503-□-□



5/32" O.D. Polyethylene Tubing
Linear low density tubing

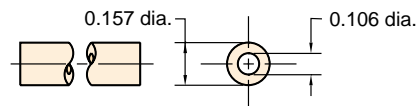

Working Range: 0 to 105 psig at 100°F Maximum 120°F
Static Burst Pressure: Over 540 psig at 75°F
Colors: Solid: Black or Natural
Lengths Available: 50 and 500 feet
Bend Radius: 1/2"
Note: Designed for use with push-in fittings.

Note:

Specify color on order, and use full product number (including code letters for color) as shown in Price List. If no color is specified, natural will be furnished.