



5/16" BORE STAINLESS STEEL CYLINDER

SSR-05-□-□


Single Acting

Mount: Stud
Type: Rotating Rod
Options: B, V, S, N

Standard Stroke Lengths: 1/2", 1", 1-1/2", 2", 3", 4"
Spring Compressed: 1 lbs. Spring At Rest: 0.5 lbs.

For bumpers add .250

For S option add .220

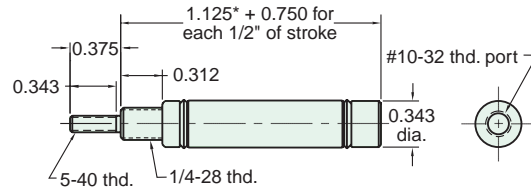

Nut included, but not shown on drawing


USR-05-□-□

Single Acting

Mount: Universal
Type: Rotating Rod
Options: B, V, N

Standard Stroke Lengths: 1/2", 1", 1-1/2", 2", 3", 4"
Spring Compressed: 1 lbs. Spring At Rest: 0.5 lbs.

For bumpers add .250

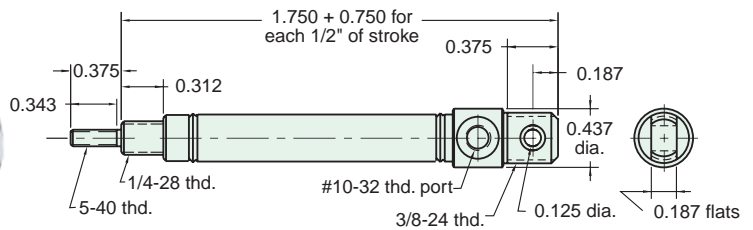

Nuts included, but not shown on drawing

SDR-05-□-□


Double Acting

Mount: Stud
Type: Rotating Rod
Options: B, V, P6, P7, P8, S, N

Standard Stroke Lengths: 1/2", 1", 1-1/2", 2", 3", 4"

For bumpers add .250

For S option add .220

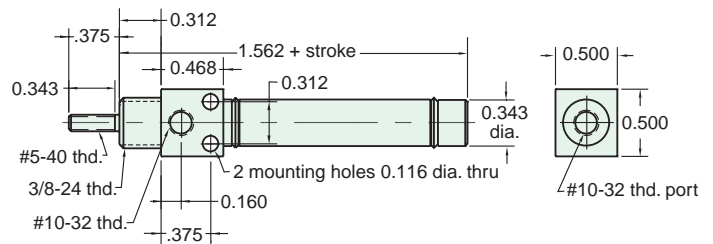

Nut included, but not shown on drawing


UDR-05-□-□

Double Acting

Mount: Universal
Type: Rotating Rod
Options: B, V, P2, P3, P4, P5, P6, P7, P8, N

Standard Stroke Lengths: 1/2", 1", 1-1/2", 2", 3", 4"

For bumpers add .250

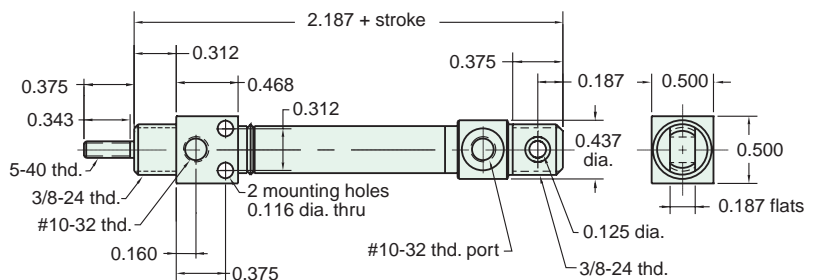

Nuts included, but not shown on drawing