

1/2" BORE STAINLESS STEEL CYLINDER




SDD-08-□-□

Double Acting

Mount: Stud **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Double Rod
Options: MB, B, V, P6, P7, P8, N

For bumpers add .500

For Magnetic Bumper add .812

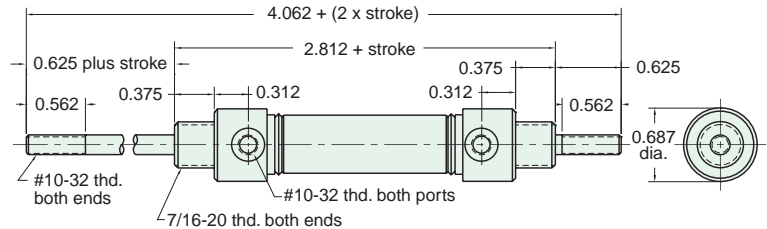

Nut included, but not shown on drawing


SRR-08-□-□

Reverse Acting

Mount: Stud **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Rotating Rod
Spring Compressed: 2 lbs. **Spring At Rest:** 0.9 lbs.
Options: MB, B, H, V, N

For bumpers add .500

For Magnetic Bumper add .812

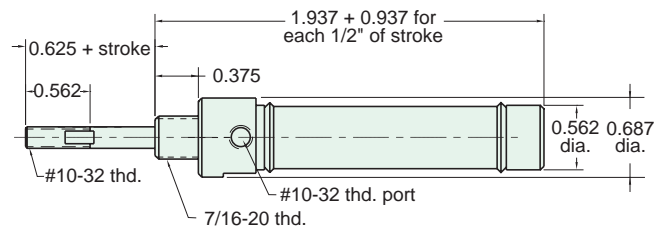

Nut included, but not shown on drawing


URR-08-□-□

Reverse Acting

Mount: Universal **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Rotating Rod
Spring Compressed: 2 lbs. **Spring At Rest:** 0.9 lbs.
Options: MB, B, H, V, P6, P7, P8, N

For bumpers add .500

For Magnetic Bumper add .812

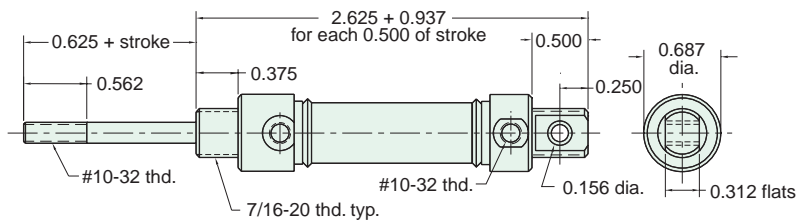

Furnished without nut(s). See Chart on Page 14.

Did you know...
 All Clippard Cylinders
 are 100% tested.

