


5/8" BORE STAINLESS STEEL CYLINDER



USN-10-□-□

Single Acting

Mount: Universal **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Non-Rotating Rod **Spring Compressed:** 4 lbs. **Spring At Rest:** 1.3 lbs.
Options: MB, B, H, V, P6, N For bumpers add .500. For magnetic bumpers add .812

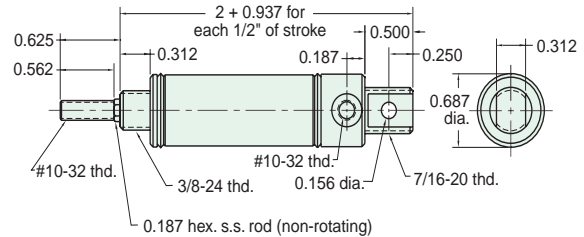


Furnished without nut(s). See Chart on Page 18.

USR-10-□-□

Single Acting

Mount: Universal **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Rotating Rod **Spring Compressed:** 4 lbs. **Spring At Rest:** 1.3 lbs.
Options: MB, B, H, V, P6, N For bumpers add .500. For magnetic bumpers add .812

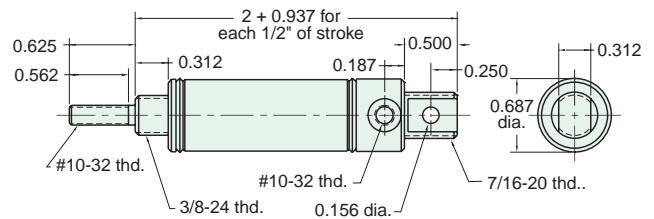


Furnished without nut(s). See Chart on Page 18.

SSN-10-□-□

Single Acting

Mount: Stud **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Non-Rotating Rod **Spring Compressed:** 4 lbs. **Spring At Rest:** 1.3 lbs.
Options: MB, B, H, V, S, N For bumpers add .500. For magnetic bumpers add .812

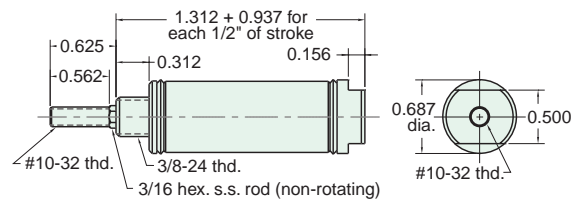


Nut included, but not shown on drawing

SSR-10-□-□

Single Acting

Mount: Stud **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Rotating Rod **Spring Compressed:** 4 lbs. **Spring At Rest:** 1.3 lbs.
Options: MB, B, H, V, S, N For bumpers add .500. For magnetic bumpers add .812

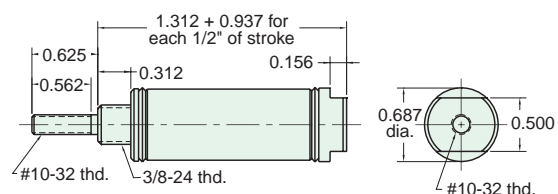

Nut included, but not shown on drawing