




5/8" BORE STAINLESS STEEL CYLINDER

FSR-10-□-□

Single Acting



Mount: Front **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Rotating Rod **Spring Compressed:** 4 lbs. **Spring At Rest:** 1.3 lbs.
Options: MB, B, H, V, S, N For bumpers add .500. For magnetic bumpers add .812

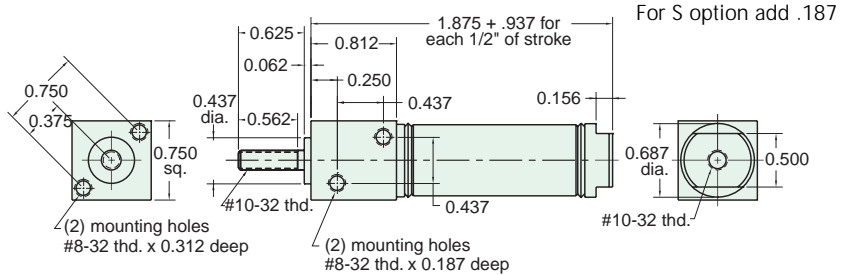


Furnished without nut(s). See Chart on Page 18.

FDR-10-□-□

Double Acting



Mount: Front **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Rotating Rod For bumpers add .500
Options: MB, B, V, P6, P7, P8, S, N For magnetic bumpers add .812

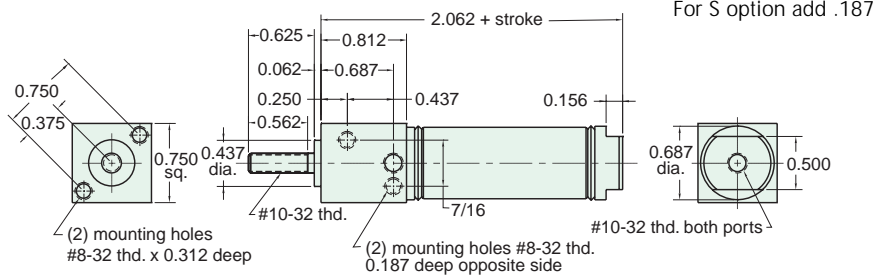


For S option add .187

SDR-10-□-□

Double Acting



Mount: Stud **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Rotating Rod For bumpers add .500
Options: MB, B, V, P6, P7, P8, S, N For magnetic bumpers add .812

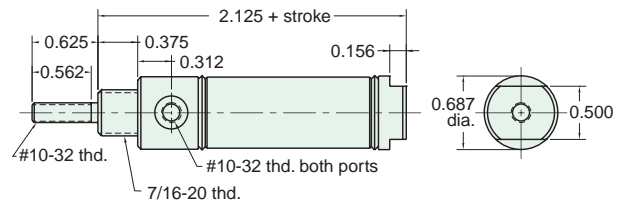

For S option add .187


Nut included, but not shown on drawing

UDR-10-□-□

Double Acting



Mount: Universal **Standard Stroke Lengths:** 1/2", " , 1-1/2", 2", 3", 4"
Type: Rotating Rod For bumpers add .500
Options: MB, B, V, P2, P3, P4, P5, P6, P7, P8, N For magnetic bumpers add .812

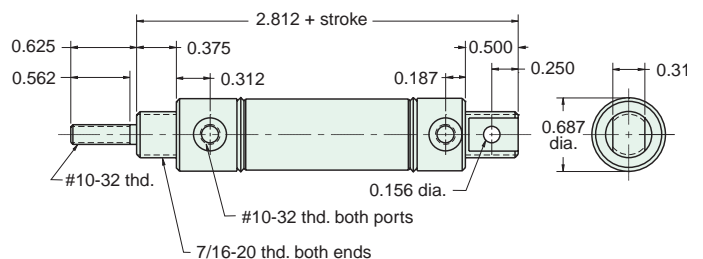

Furnished without nut(s). See Chart on Page 18.