

5/8" BORE STAINLESS STEEL CYLINDER



SDD-10-□-□


Double Acting

Mount: Stud **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"

Type: Double Rod

Options: MB, B, V, P6, P7, P8, N

For bumpers add .500
For magnetic bumpers add .812

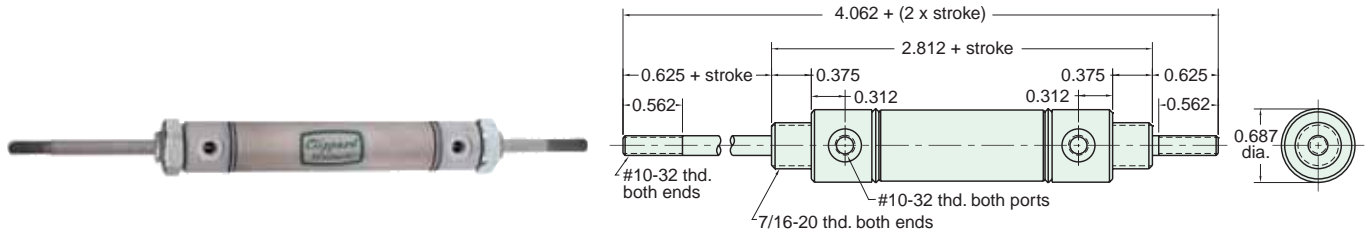

Nut included, but not shown on drawing

SRR-10-□-□

Reverse Acting


Mount: Stud **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"

Type: Rotating Rod

Options: MB, B, H, V, N

Spring Compressed: 4 lbs. **Spring At Rest:** 1.3 lbs.

For bumpers add .500
For magnetic bumpers add .812

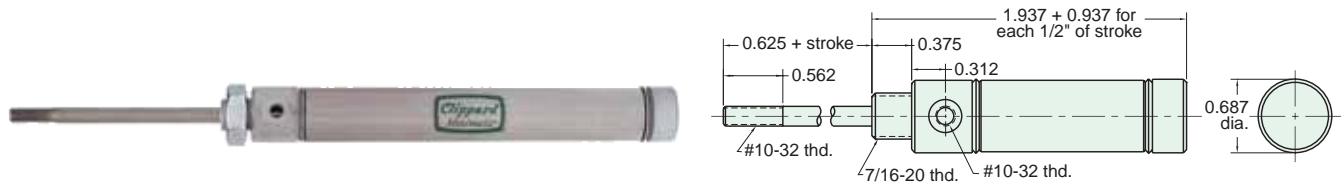

Nut included, but not shown on drawing

URR-10-□-□

Reverse Acting


Mount: Universal **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"

Type: Rotating Rod

Options: MB, B, H, V, P6, N

Spring Compressed: 4 lbs. **Spring At Rest:** 1.3 lbs.

For bumpers add .500
For magnetic bumpers add .812

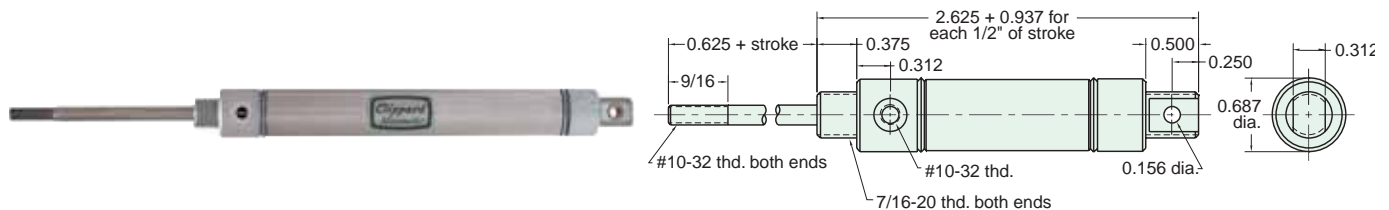

Furnished without nut(s). See Chart on Page 18.