


3/4" BORE STAINLESS STEEL CYLINDER



UDR-12-□-□

Double Acting

Mount: Stud **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Rotating rod 5", 6", 8", 10", 12"
Options: C, F, R, MB, B, W, V, P2, P3, P4, P5, P6, P7, P8, M, N For bumpers add .500
 For magnetic bumpers add .812
 For magnet add .312

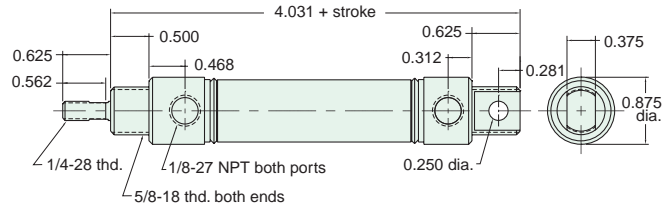


Furnished without nut(s). See Chart on Page 24.

SDR-12-□-□

Double Acting

Mount: Stud **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4", 5", 6"
Type: Rotating Rod
Options: C, F, R, MB, B, W, V, P6, P7, P8, S, M, N For bumpers add .500
 For magnetic bumpers add .812
 For C, F, R & S options add .437
 For magnet add .312

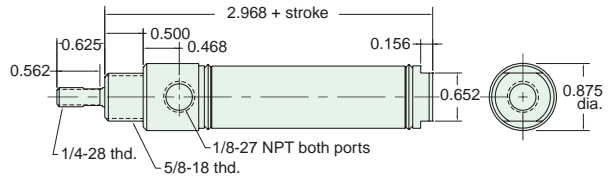


Nuts included, but not shown on drawing
 For C, F, & R options use side ported rear head

SDD-12-□-□

Double Acting

Mount: Stud **Standard Stroke Lengths:** 1", 2", 3", 4", 5", 6"
Type: Double Rod
Options: C, F, MB, B, W, V, P6, P7, P8, M, N Bumpers add .500. For magnetic bumpers add .812
 For CM, FM add .312

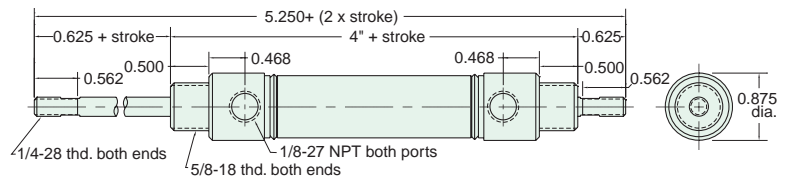


Nuts included, but not shown on drawing

SDH-12-□-□

Double Acting

Mount: Stud **Standard Stroke Lengths:** 1", 2", 3", 4", 5", 6"
Type: Hollow Rod
Options: C, F, MB, B, W, V, P6, P7, P8, M, N For bumpers add .500
 For magnetic bumpers add .812
 For CM, FM add .312

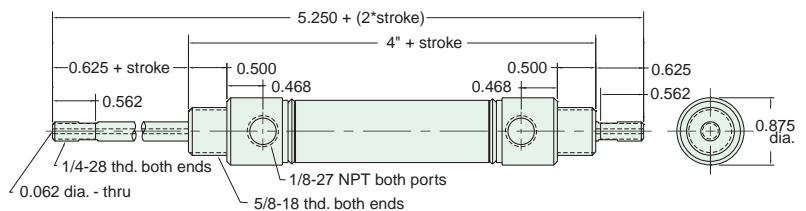

Nuts included, but not shown on drawing