




3/4" BORE STAINLESS STEEL CYLINDER

SRR-12-□-□

Reverse Acting

Mount: Stud Standard Stroke Lengths: 1/2", 1", 1-1/2", 2", 3", 4"
 Type: Rotating Rod Spring Compressed: 6 lbs. Spring At Rest: 3 lbs.
 Options: MB, B, H, W, V, N For bumpers add .375
 For magnetic bumpers add .687

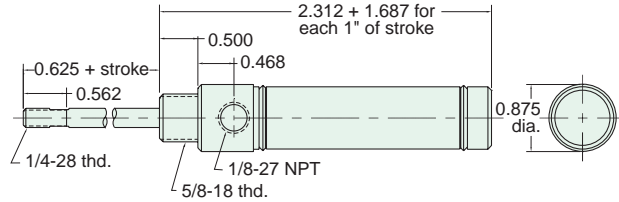


Nut included, but not shown on drawing

URR-12-□-□

Reverse Acting

Mount: Universal Standard Stroke Lengths: 1/2", 1", 1-1/2", 2", 3", 4"
 Type: Rotating Rod Spring Compressed: 6 lbs. Spring At Rest: 3 lbs.
 Options: MB, B, H, W, V, P6, N For bumpers add .500
 For magnetic bumpers add .812

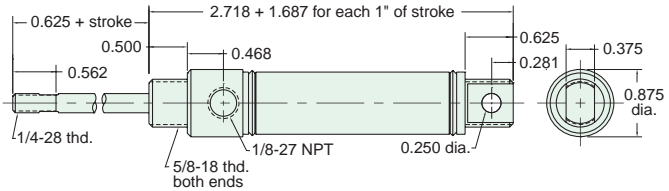


Furnished without nut(s). See Chart on Page 24.

SFD-12-□-□

Double Acting, Spring Bias

Mount: Stud Standard Stroke Lengths: 1/2", 1", 1-1/2", 2", 3", 4"
 Type: Double Rod Spring Compressed: 6 lbs. Spring At Rest: 3 lbs.
 Options: MB, B, H, W, V, P6, P7, P8, N For bumpers add .375
 For magnetic bumpers add .687

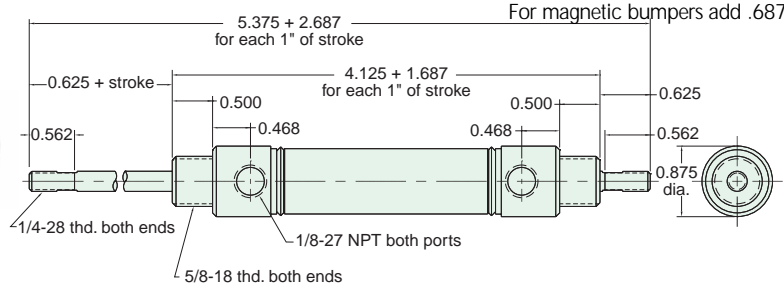


Nuts included, but not shown on drawing

SBR-12-□-□

Double Acting, Rear Spring Bias

Mount: Stud Standard Stroke Lengths: 1/2", 1", 1-1/2", 2", 3", 4"
 Type: Rotating Rod Spring Compressed: 6 lbs. Spring At Rest: 3 lbs.
 Options: MB, B, H, W, V, P6, P7, P8, S, N For bumpers add .375
 For magnetic bumpers add .687
 For S option add .437

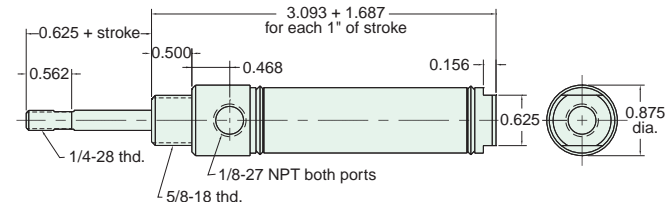

Nut included, but not shown on drawing