

# 7/8" BORE STAINLESS STEEL CYLINDER




## SSN-14-□-□

Single Acting



**Mount:** Stud      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Non-Rotating Rod      **Spring Compressed:** 6 lbs. **Spring At Rest:** 3 lbs.  
**Options:** MB, H, V, S, N      **Bumpers are standard.** For magnetic bumpers add .312

For S option add .281

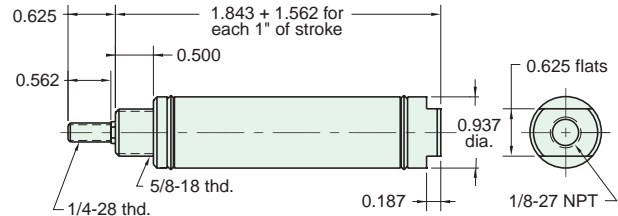

Nut included, but not shown on drawing


## SSR-14-□-□

Single Acting



**Mount:** Stud      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 6 lbs. **Spring At Rest:** 3 lbs.  
**Options:** MB, H, V, S, N      **Bumpers are standard.** For magnetic bumpers add .312

For S option add .281

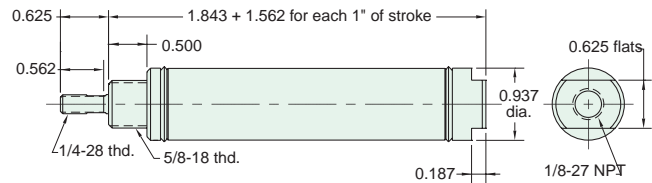


Nut included, but not shown on drawing

## USN-14-□-□

Single Acting



**Mount:** Universal      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Non-Rotating Rod      **Spring Compressed:** 6 lbs. **Spring At Rest:** 3 lbs.  
**Options:** MB, H, V, P2, P3, P4, P5, P6, P7, P8, N      **Bumpers are standard.** For magnetic bumpers add .312

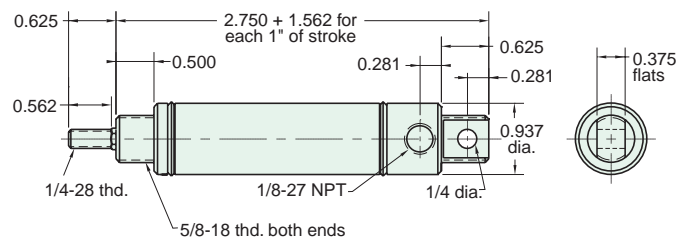

Furnished without nut(s). See Chart on Page 28.


## USR-14-□-□

Single Acting



**Mount:** Universal      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 6 lbs. **Spring At Rest:** 3 lbs.  
**Options:** MB, H, V, P2, P3, P4, P5, P6, P7, P8, N      **Bumpers are standard.** For magnetic bumpers add .312

Furnished without nut(s)  
See chart on page 28

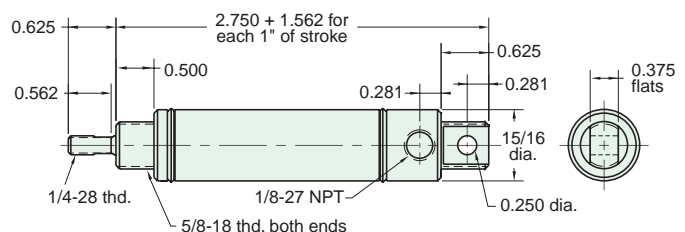

Furnished without nut(s). See Chart on Page 28.